

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 10/00		A2	(11) International Publication Number: WO 99/20664
			(43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/US98/22028		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 October 1998 (19.10.98)			
(30) Priority Data: 08/956,880 23 October 1997 (23.10.97) US			
(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(72) Inventors: SIEDLE, Allen, R.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MISEMER, David, K.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). KOLPE, Vasant, V.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). DUERR, Brook, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(74) Agents: DAHL, Philip, Y. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
		Published <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: ELASTIC POLYPROPYLENES AND CATALYSTS FOR THEIR MANUFACTURE

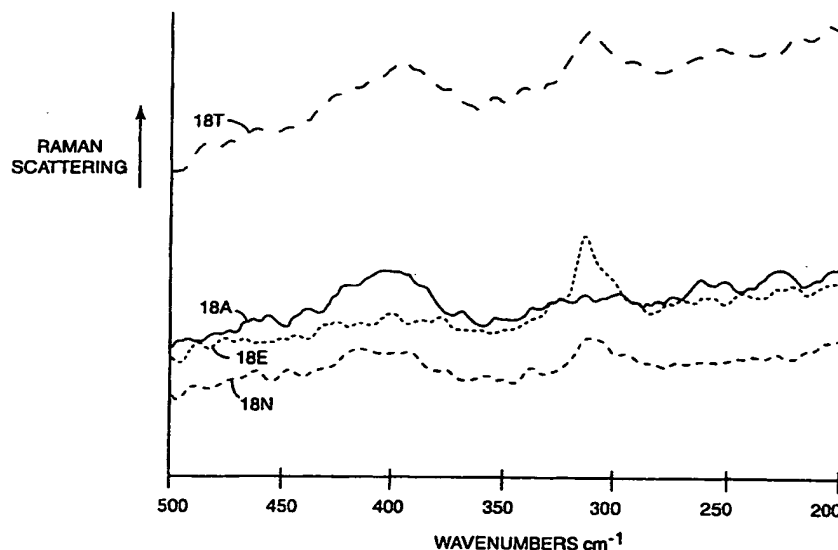

(57) Abstract

A propylene polymeric composition with elastic character that is soluble in at least one nonpolar organic solvent selected from the group consisting of toluene, xylene, heptane, and hexane, comprises greater than 3 weight percent and up to 45 weight percent homotactic sequences each having only *r* or *m* diads, all of which homotactic sequences have a helical length in the range of 20 to 150 Å, and in the range of 55 to 97 weight percent of the sum of homotactic sequences of less than 20 Å in helical length, each homotactic sequence having only *r* or *m* diads and having fewer than 10 repeat units with *mmmm* pentads being present in the range of 0 to 35 weight percent of the total composition, and heterotactic sequences having *r* and *m* diads of unequal number, the polymer having a molecular weight (M_w) of at least 70,000.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ELASTIC POLYPROPYLENES AND CATALYSTS FOR THEIR MANUFACTURE

FIELD OF THE INVENTION

5 This invention relates to a novel class of polypropylenes that possess elastic character and are hybrid polymers having stereoregularity intermediate between those that are highly syndiotactic (or highly isotactic) and those that are atactic, as well as catalysts that produce these hybrid polymers.

BACKGROUND OF THE INVENTION

10 Elastic polypropylene was first isolated by solvent extraction of polypropylene obtained by Ziegler-Natta polymerization of propylene (*inter alia*, U.S. Patent No. 3,175,999). A process for preparing primarily isotactic, fractionable, elastomeric polyolefins has been described (U. S. Patent No. 4,335,225), using a catalyst prepared
15 by reacting a solid support such as alumina with, *e.g.*, a tetraalkylzirconium compound. U.S. Pat. No. 5,594,080 discloses preparation of a stereoblock elastomeric polypropylene using a metallocene catalyst containing two unbridged phenylindenyl ligands connected to zirconium, *i.e.* (phenylindenyl)₂ZrCl₂. Chien et al. (*J. Am. Chem. Soc.*, **112**, 2030 (1990); *Macromolecules*, **25**, 1242 (1992); *Macromolecules*, **24**, 850
20 (1991)) prepared a thermoplastic, elastomeric polypropylene containing about 30% crystalline isotactic polypropylene, using a metallocene catalyst.

Collins et al. (*Macromolecules*, **28**, 3771 (1995); *Macromol. Symp.*, **98**, 223 (1995)) describe the use of zirconium and hafnium metallocene catalysts to prepare elastic polypropylene. These polymers had 29-54% *mmmm* pentads, *i.e.* they were
25 predominantly isotactic. Significantly, elastic polypropylene could only be obtained when the molecular weight was greater than 50,000 and when the *mmmm* content of the polymer exceeded 38%, using exclusively hafnium complexes.

European Patent Application No. 666,267 describes the use of a metallocene catalyst of the type {fluorenyl-C₂H₄-indenyl}ZrCl₂ to prepare polypropylene in the
30 presence of hydrogen. Polymer properties are not described. The same catalyst was used (*Organometallics*, **13**, 647 (1994)) to polymerize propylene in toluene in the absence of hydrogen; highly isotactic polymers having *mmmm* contents ranging from 38 to 64% and melting points of 104 - 110° C were obtained. When the C₂H₄ bridging

group was replaced by -SiMe₂- (U. S. Patent No. 5,391,789), only a viscous, tacky oil was obtained.

European Patent Application No. EP 707,016 describes a catalyst system comprising {2-Me-4-naphthyl-indenyl-SiMe₂-fluorenyl}ZrCl₂, a Lewis acid compound and an organoaluminum compound, to prepare elastomeric polypropylene. U.S. Pat. 5,516,848 describes a process for making elastomeric polypropylenes employing a mixture of two different metallocene catalysts, one of which was a monocyclopentadienyl transition metal compound.

Metallocene catalysts generally can be defined as catalysts comprising one or more cyclopentadienyl groups, including substituted cyclopentadienyl groups, in combination with a transition metal, typically a metal of Group IVB of the Periodic Chart (*i.e.*, titanium, zirconium, and hafnium). Useful metallocenes have been described comprising two cyclopentadienyl-type rings, in which both rings are identical (symmetrical metallocenes) and in which the two rings are different, due either to differing substitution patterns on identical ring systems or to the presence of two different ring systems (unsymmetrical metallocenes). The first reports of the use of cyclopentadienyl metallocenes to catalyze the polymerization of 1-olefins appeared in 1957. British Patent Application GB 934,281 first described metallocene catalysts of the type (R-indenyl)₂MX₂ and (R-fluorenyl)₂MX₂, where R represents an alkyl or aryl substituent on the aromatic ring, M represents titanium, zirconium or hafnium, and X represents a halide or an alkyl or alkoxy group, or the like, having from 1 to 12 carbon atoms. Since then, numerous patents and other publications have provided ample evidence of the commercial interest in these materials.

Four limiting cases illustrate the possibilities for stereoregularity in polypropylene. The isotactic structure is typically described as having the methyl side groups oriented so that they are all on the same side of the plane containing the polymer backbone. Another way of describing the isotactic structure employs Bovey's NMR (nuclear magnetic resonance) nomenclature: An isotactic diad, represented by *m* (for meso), is a pair of propylene units placed in the polymer chain so that both methyl side groups lie on the same side of the plane containing the polymer backbone. Similarly, a *mmmm* pentad represents five monomer units with their methyl groups all oriented the same way. ¹³C NMR can be used to determine the relative amounts of the various pentads present in a propylene polymer.

In contrast, in the syndiotactic structure, the methyl groups are oriented alternately above and below the plane containing the polymer backbone. A pair of propylene units with this up-down arrangement comprises an *r* (for racemic) diad, and *rrrr* would correspond to five similarly arranged monomer units.

5 *Hemi-isotactic* polypropylene is similar to the isotactic kind except that every other methyl side group has a random orientation.

Finally, in the *atactic* polymer, the orientation of the methyl groups with respect to the plane containing the polymer backbone is random and the number of *r* and *m* diads is the same.

10 The physical properties of polypropylene depend greatly on polymer stereoregularity. For example, isotactic and syndiotactic polypropylene are crystalline polymers that are insoluble in hydrocarbon solvents such as cold xylene. Because of the presence of crystallites that scatter light, they are often opaque or translucent. Additionally, these polymers are stiff, inelastic, and high-melting, their melting points
15 being 171 and 138° C, respectively.

In contrast, hemi-isotactic and atactic polymers are non-crystalline and soluble in cold xylene. Atactic polypropylene is transparent, flexible and elastomeric.

Because isotactic and syndiotactic polypropylenes are such useful materials, their preparation has been the object of extensive research. For example, catalysts that
20 produce isotactic polypropylene are disclosed in U.S. Patent Nos. 4,794,096 and 4,975,403; catalysts that lead to syndiotactic polyolefins are described in U.S. Patent Nos. 3,258,455, 3,305,538, 3,364,190, 4,892,851, 5,155,080 and 5,225,500.

The precise effect of changes in catalyst structure on catalyst activity and polymer stereoregularity is difficult to predict. For example, U.S. Patent No. 5,459,218
25 describes catalysts of the type {flu-bridge-Cp}ZrCl₂, wherein flu = fluorenyl, bridge = Me₂Si or Ph₂Si, and wherein Me = methyl, Ph = phenyl, and Cp = cyclopentadienyl. It is broadly stated and claimed that the propylene polymers contain at least 50% *rr* content, whereas the syndiotactic content actually achieved ranged from 74 to 82%. The highest molecular weight given for the propylene polymers is 66,000. No unusual
30 properties of these polymers were disclosed nor were any clues provided as to how the catalysts could be modified to produce polymers having a lesser or greater syndiotactic content. By comparison, U. S. Patent No. 4,892,851 describes a catalyst of a very

similar type, namely {flu-CMe₂-Cp}ZrCl₂, which is reported to produce even more highly syndiotactic (92% *rr*) polypropylene.

A relationship between catalyst symmetry and polypropylene stereostructure has been proposed (*Trends in Polymer Science*, 2, 158 (1994)). Symmetry elements, typically described in terms of "point groups" of a bis(fluorenyl)MX₂-type catalyst are shown in Figures 1 and 2 (comparative). Fig. 1 illustrates the different symmetry elements that can occur in metallocene catalysts and Fig. 2 provides illustrative examples. A catalyst (Fig. 1 and, e.g., Fig. 2 entry 20) having point group C_{2v} has three symmetry elements: the structure is unchanged after a 180 degree rotation about the bisector of the MX₂ plane and there are two mirror planes of symmetry, reflections in which leave the structure unchanged. One contains the MX₂ plane σ_h and the other is orthogonal to and bisects the MX₂ plane σ_v . Looking straight on at the MX₂ plane, one sees that the top and bottom as well as the left and right hand side of the catalyst molecule are the same. A catalyst 21 having point group C₂ (entry 21 in Fig. 2) contains only a C₂ axis: the top and bottom of the molecule are the same, so that 180 degree rotation about the bisector of the MX₂ plane leaves the structure unchanged. Catalyst 22 having point group C_s contains only a mirror plane of symmetry orthogonal to and bisecting the MX₂ plane. Viewed as described above, the left- and right hand sides of the catalyst are the same but the top and bottom are different. Catalyst 25 of C₁ point group symmetry contain none of these three symmetry elements.

According to Figure 2, catalysts of point group C_{2v} are said to produce atactic polypropylene, except that Cp₂TiPh₂ (24) atypically produces a stereoblock isotactic polymer (perhaps by a different polymerization mechanism) at low temperatures. Metallocenes having C₂ and C_s point group symmetry are said to produce isotactic and syndiotactic polymers, respectively. However, U.S. Patent No. 4,769,510 describes catalysts of the type {ind-bridge-ind}MX₂, which exists in two isomeric forms. One form is chiral and consists of a d,l pair of enantiomers; it produces isotactic polypropylene. The second (meso) form is achiral and produces atactic polypropylene (*Organometallics*, 14, 1256 (1995)). Catalysts with C₁ symmetry are said to produce either hemi-isotactic 23 (in Fig. 2) or stereoblock isotactic-atactic 25 (in Fig. 2) polypropylene.

European Patent Application No. 537,130 describes the effect of the size of an organic group attached to a cyclopentadienyl ring in metallocenes of the type {Cp-CMe₂-flu}ZrCl₂ (C_s point group symmetry), which was shown to produce syndiotactic polypropylene. Introduction of a methyl group into the 3-position of the cyclopentadienyl ring led to {3-MeCp-CMe₂-flu}ZrCl₂ (C₁ point group symmetry), which produced a hemi-isotactic polymer. When the 3-CH₃ group was replaced by a t-butyl group to form {3-t-BuCp-CMe₂-flu}ZrCl₂ (also C₁ point group), isotactic polypropylene was obtained instead.

U.S. Patent No. 5,459,218 relates to syndiotactic polypropylene prepared using silyl bridged metallocenes and having molecular weights up to 66,000. U.S. Patent No. 5,668,230 discloses certain specific ethylene bridged fluorenyl-containing metallocenes to catalyze olefins polymerization.

One skilled in the art can only conclude that there are no reliable, general correlations between the structure of a metallocene catalyst and the stereospecificity or the stereoregularity of polymers produced thereby.

SUMMARY OF THE INVENTION

Briefly, the present invention provides propylene homopolymers that are elastomeric and are soluble in at least one nonpolar organic solvent selected from the group consisting of toluene, xylene, heptane, and hexane, the polymer comprising

- a) greater than 3 weight percent and up to 45 weight percent of homotactic sequences, each having only *r* or *m* diads, all of which homotactic sequences have a helical length in the range of about 20 to 150Å, and
 - b) in the range of 55 to 97 weight percent of the total composition being the sum of
 - 1) homotactic sequences, each having only *r* or *m* diads, and being less than 20Å in helical length and having fewer than 10 repeat units with *mmmm* pentads being present in the range of 0 to 35 (preferably 0 to 31) weight percent of the total composition, and
 - 2) heterotactic sequences having unequal numbers of *r* and *m* diads,
- the polymer having a weight average molecular weight (M_w) of at least about 70,000, preferably greater than 70,000 and up to 2,000,000, more preferably 75,000 to 1,000,000, and most preferably 80,000 to 500,000. The two b) components can be

present in any amount so long as their sum amounts to 55 to 97 weight percent of the total composition.

The propylenes of the invention include homotactic sequences of length as specified above having all *r* or all *m* diads. As is appreciated by those skilled in the art, these homotactic sequences can assume a helical configuration. Connecting these homotactic sequences are similar homotactic sequences of less than 20Å in helical length and having less than 10 repeat units as well as heterotactic sequences having both *r* and *m* diads present in unequal numbers. These polymers exhibit elastomeric character that varies from a stiff rubber to that of a very stretchy rubber band. The homotactic sequences can be all *r* or all *m* and preferably they are all *r*, i.e., syndiotactic. In general, the polymers comprise discontinuous small (20Å to 150Å in length) hard segments in a continuous softer matrix.

The length of the homotactic sequences can be estimated in the following way. Helical chains of polypropylene run approximately parallel to the c-axis of the unit cell of orthorhombic syndiotactic polypropylene. Four monomer units are contained in the unit cell which is 7.6 Å long. Therefore, each molecule of propylene contributes 7.6/4 or 1.9Å to the chain length. This is a reasonable estimate because if the chain were fully extended, each propylene would contribute the distance of two C-C bonds or 3Å to the chain length.

The heterotactic sequences comprise both *r* and *m* diads and are of variable lengths and are randomly dispersed as to size and distribution in the polymer chain.

Preferably, the propylene polymers of the invention also have one or more of the following characteristics:

i) a stereoregularity index between 1.30 and 10.0, preferably 1.30 to 7.00 and more preferably 1.60 to 6.40.

ii) a heat of fusion (ΔH_{fus}) that is less than 50% of the ΔH_{fus} of 100% isotactic polypropylene when $mm > rr$; or less than 50% of the ΔH_{fus} of 100% syndiotactic polypropylene when $rr > mm$, (ΔH_{fus} values are as given in J. Brandrup et al., POLYMER HANDBOOK, 3d Edition, John Wiley & Sons, NY (1989), section V, p. 29); and

iii) optical clarity.

In another aspect, this invention provides blends of two or more different propylene polymers, at least one of which exhibits the properties described above. Blends of one or more propylene polymers as described above can further comprise crystalline or amorphous polypropylene, tackifying resins, antioxidants, fillers, and other adjuvants known in the art.

In yet another aspect, this invention provides copolymers of propylene wherein the propylene sequences are as defined above, and wherein the comonomers can be olefins having 2 to 20, preferably 2 to 8, carbon atoms. Copolymers can be blended with one another as well as with homopolymers which provides a way to tailor or modify polypropylene properties. Molecular weight of copolymers (M_w) can be in the range of 35,000 to 2,000,000, preferably 50,000 to 1,000,000, more preferably 70,000 to 500,000.

In a further aspect, this invention provides metallocene catalysts for propylene polymerization, having the structure



wherein

ligand1 and *ligand2* are different and are selected from the group consisting of substituted and unsubstituted cyclopentadienyl (Cp), indenyl (ind), fluorenyl (flu), 4,5-dihydrocyclopentaphenanthryl (H₂CPA), and cyclopentaphenanthryl (CPA) ring groups, wherein, when present, ring group substituents can be selected from the group consisting of

- i) C₁ - C₄ straight-chain or branched alkyl,
- ii) C₆ - C₂₀ aryl,
- iii) C₇ - C₂₀ alkylaryl,
- iv) C₄ - C₇ cycloalkyl,
- v) (-CH₂)_n, wherein n is 2, 3, 4, or 5, or (-CH=CH-) _m wherein m is 1, 2, 3, or 4, connecting two positions (i.e., adjacent or non-adjacent ring carbon atoms) in the same ring structure, preferably the 4 and 5 positions in fluorenyl or indenyl,
- vi) fused aromatic rings, and
- vii) fused aromatic rings substituted by any one of groups i) - v);

bridge is a linking group joining *ligand1* and *ligand2* at C-1 of Cp or ind ligands or C-9 of flu and CPA ligands and is selected from the group consisting of

- i) $>CR^1R^2$,
- ii) $>SiR^1R^2$,
- iii) $-CR^1R^2 - CR^3R^4-$,
- iv) $-SiR^1R^2 - SiR^3R^4-$,
- v) $-CR^1R^2 - SiR^3R^4-$,

wherein R^1 , R^2 , R^3 , and R^4 can be the same or different and are selected from the group consisting of H, $C_1 - C_{20}$ straight-chain or branched alkyl groups, $C_6 - C_{20}$ aryl groups, and $C_3 - C_8$ cycloalkyl groups;


M is a metal atom selected from the group consisting of Zr, Hf, and Ti, preferably is zirconium or hafnium, and most preferably zirconium, and

X is selected from the group consisting of Cl, Br, I, $C_1 - C_{20}$ straight-chain or branched alkyl groups, $C_6 - C_{20}$ aryl groups, $C_7 - C_{20}$ alkaryl groups, and $C_7 - C_{20}$ aralkyl groups,

wherein the metallocene catalyst exhibits an asymmetry parameter of 1.03 to 1.69, preferably 1.03 to 1.45, more preferably 1.05 to 1.35,

with the proviso that the metallocene catalyst provides propylene polymers described above.

In a still further aspect, this invention also provides a method of making novel catalyst precursor compounds of the type



wherein ligand1 and ligand2 are as previously defined, the method comprising the steps:

- 1) deprotonating the hydroxyl group of a compound of the type
ligand1- CH_2CH_2OH ;

- 2) reacting the deprotonated compound with a perfluoroalkylsulfonyl fluoride of the type R_fSO_2F to obtain a stable perfluoroalkylsulfonate of the type
ligand1- $CH_2CH_2-OSO_2R_f$;


wherein R_f means an alkyl group having 1 - 20 carbon atoms or an aryl group having 5 to 12 carbon atoms in which at least 75% of H atoms have been replaced by F atoms;

- 3) condensing the perfluoroalkylsulfonate with the conjugate base of a compound of the type



wherein ligand1 and ligand2 are as previously defined and R_f is independently selected from the group consisting of highly fluorinated or perfluorinated alkyl radicals containing from 1-20 carbon atoms.

In yet a further aspect, there is provided a novel class of metallocene catalysts that are particularly useful to prepare hybrid polymers of the present invention, i.e. those having intermediate stereoregularity between those that are highly syndiotactic (or highly isotactic) and those that are atactic, the novel catalysts of the present invention having the formula:

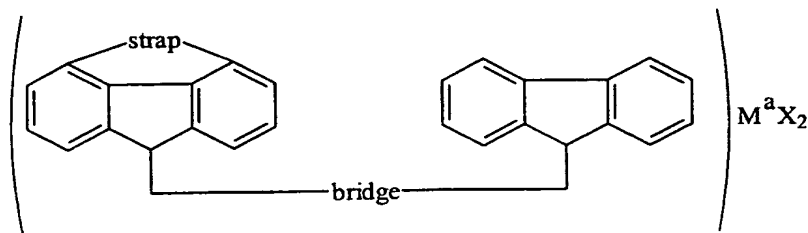

wherein

strap can be a $(-CH_2-)_n$ group or a $(-CH=CH-)_m$ group,

bridge is as previously defined,


M^a is Zr or Hf,

n is 1, 2, 3, or 4 and m is 1, 2, 3, or 4, and

X is as previously defined,

with the proviso that when $M^a = Zr$, $X = Cl$, and bridge = C_2H_4 , then strap can be $(-CH_2-)_n$ or $(-CH=CH-)_m$, wherein $n = 3, 4$ or 5 , and $m = 2, 3$, or 4 and can be designated m' .

In yet another aspect, this invention also provides a method of controlling the stereostructure of polypropylene by choosing the shape of a metallocene catalyst, as defined by its asymmetry parameter, from the class of catalysts having the structure



wherein

ligand1 and ligand2, bridge, M , and X are as previously defined, and

wherein the metallocene catalyst exhibits an asymmetry parameter of 1.03 to 1.69, and the stereoregularity index of said polypropylene increases from about 1.30 to about 10.00 with an increase in the asymmetry parameter of the catalyst.

Preparation of the hybrid polypropylenes of the invention is accomplished by combining propylene with a metallocene catalyst, preferably in the absence of solvent

for the monomer, in an inert atmosphere at a pressure in the range of 69 to 6890 Kpa at a temperature in the range of -20°C to about 120°C. When a solvent is used, it can be a hydrocarbon, preferably aliphatic, cycloaliphatic, or aromatic, more preferably it is toluene or cyclohexane. Activation of the metallocene is accomplished by activators known in the art, preferably methylaluminoxane alone or in combination with trialkylaluminum compounds such as trimethylaluminum, triethylaluminum, or triisobutylaluminum.

As used herein:

"asymmetry parameter (A.P.)" is defined as the ratio of the van der Waals surface area of the larger ligand to that of the smaller ligand, wherein the van der Waals surface area can be calculated by CAChe™ Satellite molecular modeling program (version 3.8) (Oxford Molecular Ltd., Oxford, United Kingdom) on a Macintosh computer; this is a measure of the asymmetric character of a molecule;

"atactic" means " polypropylene having no dominant tacticity and having 25% *mm* triads and 25% *rr* triads, as determined by NMR spectroscopy;

"Cp or cp" means cyclopentadienyl;

"CPA" means cyclopentaphenanthryl;

"elastomeric" or "elastic" means a material that at room temperature can be stretched repeatedly to at least twice its original length and, immediately upon release of the stress, returns with force to its approximate original length;

"entanglement molecular weight (\bar{M}_e)" means average molecular weight of chains between entanglements in a polymer;

"film" means a self-supporting layer;

"flu" means fluorenyl;

"group" or "radical" or "compound" or "ligand" or "monomer" or "polymer" means a chemical species that allows for substitution or which may be substituted by conventional substituents which do not interfere with the desired product; e.g., substituents can be alkyl, aryl, phenyl, etc.; and

"H₂CPA" means 4,5-dihydrocyclopentaphenanthryl;

"helical length" means the length of a segment in a coiled configuration in contrast to the fully extended polymer segment;

"heterotactic" sequences are those having both *r* or *m* diads;

"highly fluorinated" (R_f) means having at least 75% of H atoms in an alkyl cycloalkyl, or aryl group substituted by fluorine atoms;

"highly isotactic" means polypropylene having an *mm* content of at least 80%, as determined by NMR spectroscopy;

5 "highly syndiotactic" means polypropylene having an *rr* content of at least 80%, as determined by NMR spectroscopy;

"homotactic" sequences are those having diads which are all *r* or all *m*.

"ind" means indenyl;

10 "isotactic" or "isotactic-rich" means polypropylene having tacticity shown in Figure 2 (second entry) and having an *mm* content of greater than the *rr* triad content, as determined by NMR spectroscopy;

"Me" means methyl;

15 "metallocene" means a metal-organic compound characterized by π -bonds between a transition metal and a cyclopentadienyl, indenyl, or fluorenyl ligand, or such substituted ligands;

"*mm* triads" refers to an isotactic structure having three propylene units placed in a polypropylene backbone such that all three methyl side groups lie on the same side of the plane containing the polymer backbone, as determined by NMR spectroscopy;

20 "*mr* triads" refers to a stereoregular polypropylene structure having three successive propylene units placed in a polypropylene backbone such that, relative to the first propylene unit, the methyl group of the second propylene lies on the same side of the plane containing the polymer backbone and the methyl group of the third propylene lies on the opposite side of the plane containing the polymer backbone, as determined by NMR spectroscopy;

25 "nanocrystalline" means having crystallites in the nanometer size range (largest length), preferably 2 to 200nm;

"optical clarity" means transmittance of greater than 80% of light of wavelengths of 400 - 750 nm;

30 "peak molecular weight," M_p , means the maximum molecular weight in a curve relating molecular weight and the abundance of a species of a given molecular weight determined by gel phase (or size exclusion) chromatography;

"Ph" means phenyl;

"*rr* triads" refers to a syndiotactic structure having three propylene units placed in a polypropylene backbone such that each successive methyl side group is alternately above and below the plane containing the polymer backbone, as determined by NMR spectroscopy;

5 "soluble" means dissolves to an extent of greater than 98 weight percent at a temperature up to the boiling point of the stated solvent;

"stereoregularity index (S.I.)" of a propylene polymer is defined as the ratio of the percentage of *mm* triads to *rr* triads, wherein the ratio represents the larger of *mm* or *rr* over the smaller of *mm* or *rr* (*i.e.*, the ratio is positive and greater than 1); and

10 "syndiotactic" or "syndiotactic-rich" means polypropylene having tacticity shown in Figure 2 (third entry) and having an *rr* content of greater than the *mm* triad content, as determined by NMR spectroscopy.

Metallocene catalysts that produce highly isotactic or highly syndiotactic polymers exhibit a number of chemical and/or structural similarities:

15 1) These catalysts very often contain a MX_2 unit ($\text{M} = \text{Ti}, \text{Zr}, \text{or Hf}; \text{X} = \text{Cl}, \text{Br or CH}_3$, most commonly Cl) bonded to two variously substituted cyclopentadienyl-type ligands such as cyclopentadienyl itself, 1-indenyl or 9-fluorenyl.

2) The two cyclopentadienyl-type ligands may be connected by a bridging group joined at the C-1 position in the indenyl moiety or the C-9 position in the
20 fluorenyl moiety. The groups $-\text{CH}_2-\text{CH}_2-$ and $-\text{SiMe}_2-$, wherein Me = methyl, are common examples.

3) During the course of activation by an organoaluminum compound such as methylaluminoxane or mixtures of methylaluminoxane and other co-catalysts, Cl is replaced by one or two alkyl groups derived from the organoaluminum compound so
25 that equivalent results for compounds containing a MCl_2 or $\text{M}(\text{Me}_2)$ moiety are often seen.

4) Once a basic catalyst structural type that provides isotactic or syndiotactic polymer has been recognized, stereoregularity can be increased by further adjustments of the structure through introduction of organic groups on the
30 cyclopentadienyl-type ligands.

However, prior to the present invention it was not possible to predict the physical properties of polypropylene of intermediate stereoregularity based on the shape of the metallocene catalyst.

5 Metalocene catalysts of the invention produce novel propylene polymers, herein sometimes referred to as hybrid polymers, whose stereoregularity lies between highly syndiotactic (or highly isotactic) and atactic. Polymers thus obtained exhibit novel and useful properties, for example resistance to creep at high temperatures or extreme extensibility, which properties have not been previously observed in polypropylene.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 shows the symmetry elements of an unsubstituted, bridged bisfluorenyl metallocene catalyst that is known in the art.

Fig. 2 shows the relationship between metallocene catalyst symmetry and polypropylene stereostructure for selected catalysts (20, 21, 22, 23, 24, 25) as is known in the art.

15 Fig. 3 shows the relationship between stereoregularity index (S.I.) and asymmetry parameter (A.P.) for metallocene catalyst-polypropylene pairs of the invention; preferred pairs fall within area II, IV, V, VII; more preferred pairs fall within area II, III, VI, VII.

20 Fig. 4 shows the dynamic mechanical analysis spectrum and the variation of tensile storage modulus E' , loss modulus E'' and loss tangent ($\tan \delta$) with temperature for a polypropylene prepared using a metallocene catalyst in accordance with the invention (see Example 19, below).

Fig. 5 shows the variation of tensile modulus E' with temperature, after 28 days of aging at 23° C, for a polypropylene prepared using a metallocene catalyst in accordance with the invention (see Example 20, below).

25 Fig. 6 shows Raman scattering traces of polypropylenes of the invention (18T and 18N) and comparative polypropylenes (18A and 18E).

DETAILED DESCRIPTION OF THE INVENTION

30 The present invention presents a simple, quantitative (numerical) means of describing the shape of metallocene catalysts, even those which have yet to be made. Using this simple metrical parameter, and noting the symmetry planes present in the structure of the catalyst molecule, it is possible to predict whether the catalyst will produce a highly isotactic polypropylene, one that is highly syndiotactic, or atactic.

Polymers of the invention have properties that are not adequately described by any of the conventional designations, and may be referred herein as a hybrid polymer. The invention also presents a numerical measure of the stereoregularity of a poly(1-olefin).

As described above, propylene homopolymers can be divided according to their stereoregularity into three broad categories: isotactic, syndiotactic and atactic. The former two materials are crystalline, high melting, insoluble in (and resistant to) common organic solvents, stiff, tough and nontacky. They are particularly well suited to engineering applications where their high strength is beneficial.

These are, as has been mentioned, limiting cases and they are describable in essentially statistical terms. Commercially available isotactic polypropylene can have an *mm* content of 90% or higher and commercial syndiotactic polypropylene can have an *rr* content of 70% or higher. Atactic polypropylene is not at present commercially available but descriptions of it in the art refer to tacky material in which the *mm* and *rr* content are each about 25%.




The present invention is directed toward preparation of novel propylene polymers whose *mm* (or *rr*) content exceeds 25% (which can be characterized as constituting a flexible, tacky polymer) to greater than 65% (where a high degree of structure can contribute significantly to the physical properties such as modulus and resistance to flow). Polymers of intermediate stereoregularity can be hybrids, *i.e.* they can combine some of the properties of both highly crystalline and amorphous polymers, such as, for example, a material that is both tough and tacky.


In order to obtain such hybrid polymers, hybrid catalysts, intermediate in structure between those used to make highly isotactic (or highly syndiotactic) polypropylene and atactic polypropylene, are required. Unfortunately, as described above, the necessary features of such a hybrid catalyst have been difficult or impossible to identify by study of the art. What is needed, and provided by the present invention, are low symmetry catalysts (low A.P.) as well as a means of describing their shape, *e.g.*, molecules that could not be adequately described by point group symmetry.

Metallocene catalysts in which two cyclopentadienyl-type ligands are connected by a bridging group are known. Such a bridge holds the two ligands in fixed positions relative to one another. Rotation of the ligands is prevented, substituents on the ligands are fixed in the molecular structure, and the catalyst has, therefore, a permanent and definite shape.

When bridged metallocene catalysts are used, polymerization activity, *i.e.*, joining an entering monomer molecule to the growing polymer chain, takes place in a very specific region of the metallocene catalyst molecule. For example, in a metallocene catalyst of the type (ligand)₂ZrCl₂, polymerization activity takes place around the -ZrCl₂ region. Numerous metallocene catalysts have been described having substituent groups at every conceivable free site of the ligand ring groups. However, many positions at which substituents could be introduced are so distant from the polymerization site (*i.e.*, metal center) that substituents placed there have little or no effect on the stereochemical outcome of the polymerization. In the present invention, substituents located more than about 5 Å from the metal center are ignored. For example, in fluorenyl ligands connected at C-9 to a bridge, substituents placed at the C-1, C-2, C-7 or C-8 ring positions are of essentially no stereochemical significance. In contrast, the C-4 and C-5 positions are quite close to the metal atom at which polymerization occurs so the size and nature of substituents located there are critical determinants of the catalyst's stereospecificity. Similarly, in bridged metallocenes containing a cyclopentadienyl-bridge-indenyl moiety (with the bridge being connected at C-1 of the indenyl ring group), substituents located at C-3 or C-4 in the cyclopentadienyl ligand; or at C-2, C-3, C-4, or C-5 in the indenyl ligand are considered of primary importance.

The numbering systems for cyclopentadienyl, indenyl, fluorenyl, and cyclopentaphenanthryl ligands are shown below:





cyclopentaphenanthryl
(CPA)

Unsymmetrical bridged metallocene catalysts of the invention can be characterized by an *asymmetry parameter* (A.P.) as follows. For a metallocene catalyst of the type {ligand1-bridge-ligand2}MX₂, wherein M is selected from the group consisting of Ti, Zr, and Hf and each X is as previously defined, A.P. is the ratio area of the van der Waals surface of the larger ligand to that of the smaller, as determined by computer-assisted molecular modeling, such as, for example, the CAChe™ suite of programs from Oxford Molecular Inc. It is always continuous, positive and equal to or greater than 1. The surface areas of the ligand includes contributions from substituents at the critically important positions described above (*i.e.*, those that are less than about 5 Å from the metal center). Substituents at other positions are ignored and hydrogen atoms are assumed to reside at those positions. The A.P. provides a numerical measure of the degree of asymmetry of a catalyst. The larger the value of A.P. for a metallocene, the more unsymmetrical it is. Surface areas for the individual ligands are the areas comprising the constituent atoms at their van der Waals radii. They can be readily calculated using, *e.g.*, the CAChe™ molecular modeling program. This program also permits placement of a substituent at a given position in an optimized geometry that minimizes non-bonded repulsions. For example, in calculating the surface area of a 3-phenylcyclopentadienyl ligand fragment, the five- and six-membered rings are not coplanar. The phenyl ring is allowed to rotate out of the plane of the cyclopentadienyl ring so as to reduce unfavorable steric interactions between hydrogen atoms. Several examples that illustrate how A.P. values are calculated follow.

A.P. for {flu-C₂H₄-flu}ZrCl₂ is 1.00 by definition because both ligands are the same. Because the bulky but distant t-butyl groups are ignored, it is 1.00 as well for the

analogous {2,7-di-*t*-butyl-flu-C₂H₄-flu}ZrCl₂. Surface areas of fluorenyl and indenyl groups are calculated to be 151 and 112 square Angstroms, respectively. Therefore, A.P. for both of the catalysts {flu-C₂H₄-ind}ZrCl₂ and {flu-SiMe₂-ind}ZrCl₂ is 151/112, or 1.35.

5 We have found that one effective way of altering the shape (and A.P.) of catalysts is to connect the 4 and 5 positions of one of the fluorene rings by means of (-CH₂-)_n or (-CH=CH-)_m, wherein n = 2, 3, 4, or 5, and m = 1, 2, 3, or 4, methylene or vinylene groups that are connected to one another so as to form a ring. Relative to an unsubstituted fluorene ring, these substituents increase the van der Waals surface areas thus making the substituted fluorene portion of the ligand larger and so increase the asymmetry parameter. In Table 2, these moieties are referred to as a STRAP. The two halves of the ligand molecule are connected with a BRIDGE which serves to inhibit rotation or movement of the different parts of the catalyst molecule and imparts to it a permanent and persistent shape.

10 Another effective means of providing asymmetrical catalysts is to use a ligand of the type flu-bridge-ind. This is related to the symmetrical flu-bridge-flu ligand by replacement of one (CH)₄ benzo rings by two hydrogen atoms. Again, the catalyst molecule has a persistent shape in contrast with asymmetrical, unbridged catalyst molecules. Unlike (ind(1)-bridge-ind(2))MCl₂ catalysts, wherein (1) and (2) indicate nonequivalent indenyl-type ligands and which exist as *d,l* and meso isomers (the former gives isotactic and the latter atactic polypropylene), such isomerism is not possible.

15 In order to correlate A.P. with stereoregularity, a numerical measure of stereoregularity, called the *stereoregularity index*, or S.I., is defined as follows: In a perfectly atactic polymer, the two homotactic triads, *mm* and *rr*, are present in equal amounts, 25% each. As the polymer becomes increasingly stereoregular, the relative amounts of *mm* and *rr* change so that one increases to be greater than the other. S.I. is the ratio of the larger of *mm* or *rr* to the smaller of *mm* or *rr* and is always positive and greater than 1. S.I. expresses in a numerical way how the stereochemical arrangement of monomer sequences shifts away from 1.00 for a random, atactic polymer to larger values characteristic of more stereoregular polymers. For example, ¹³C NMR analysis of polypropylene made using the catalyst {flu-C₂H₄-ind}ZrCl₂ (activated with

methylaluminoxane) showed that the *mm:mr:rr* ratio is 26:31:43, so the S.I. is 43/26, or 1.65.

The S.I. does not indicate whether a particular polymer is isotactic or syndiotactic but this can be shown by adding the letter S or I after the S.I. value. In the example above, one would have 1.65S, indicating that the polymer is syndiotactic-rich. However, this distinction matters little when S.I. values are large, because highly iso- or syndiotactic-rich polymers share properties outside of the scope of the present invention: high crystallinity, opacity, high melting points, stiffness and insolubility in aromatic and aliphatic hydrocarbons. These properties begin to occur in polypropylenes whose stereoregularity indices are greater than about 6.6.

The asymmetry parameter of a metallocene catalyst can be related to the stereoregularity index of the polypropylene that it produces and therefore to the physical and mechanical properties of the polymer. Polypropylenes produced with metallocene catalysts whose asymmetry parameters are about 1.0 are essentially atactic with stereoregularity indices between about 1.0 and about 1.3.

The stereochemical irrelevance of large bulky groups that are placed in positions far removed (*i.e.*, greater than 5 Å) from the reaction center is illustrated by the metallocene catalysts {(2,7-*R*₂flu)-C₂H₄-(flu)}ZrCl₂ (wherein *R* = *t*-butyl or *p*-tolyl). These produced polypropylenes with S.I. values of 1.26 and 1.08, respectively, and whose NMR spectra were consistent with that of an atactic polymer.

Asymmetry in the bridging element has little effect on the stereochemical outcome of the polymerization. For example, polypropylene obtained with the catalyst {flu-CH₂-SiMe₂-flu}ZrCl₂ is atactic and has an S.I. value of 1.04.

When the asymmetry parameter of a metallocene catalyst is above about 1.69, both stereoregularity and crystallinity of the product polypropylene rise sharply. This is illustrated by Figure 3 and Table 1. For example, the catalyst {4-(1-naphthyl)-2,7-di-*t*-butyl-flu-C₂H₄-flu}ZrCl₂ (18H, below, A.P.=1.70) produced crystalline, very isotactic-rich polypropylene with *mm:mr:rr* 80:14:6 (stereoregularity index = 13.3). The catalyst {flu-CMe₂-Cp}ZrCl₂ is even more asymmetric and has a very large A.P. value of 2.09 (18E, below). It is reported (Ewen, et al., in *Catalytic Olefin Polymerization*, T. Keii and K. Soga, eds., Elsevier (1990), p. 439) to produce highly isotactic polypropylene with an S.I. value of 27.3.

Thus, the shape of a metallocene catalyst, reflected in its asymmetry parameter, is a critical determinant of polymer stereoregularity and crystallinity. Catalysts whose A.P. values lie between about 1.03 and 1.69 have been found to be useful in the preparation of hybrid polypropylenes, that is, polypropylenes having physical and mechanical properties that are not characteristic of the extremes represented by either atactic or very stereoregular materials, but rather are intermediate between the two limiting cases. Such catalysts enable synthetic access to a continuum of new polypropylenes, with a continuum of properties, that lies between these two extremes. Hybrid polymers can have a wide variety of microstructures and their S.I. values can vary from 1.30 to 10.00. In Fig. 3, area II, IV, V, VII indicates the range of asymmetry parameters and stereoregularity indices found to be associated with these new, hybrid polymers of the present invention.

While many of the catalysts of this invention contain fluorenyl moieties, their presence is not necessary in order to obtain polypropylenes in the range of S.I. values claimed. This is illustrated by Example 18-V, below, in which the 6-membered benzene rings have been catalytically hydrogenated; in this way, they become tetramethylene, $(CH_2)_4$, moieties connected to cyclopentadienyl rings. This example underscores the fact that it is not the specific nature of the cyclopentadienyl-type rings in the catalysts that determines stereoregularity. Rather, it is the shape of the catalyst (taken as a single molecular unit) expressed through its asymmetry parameter (A.P.) that controls the stereoregularity index.

Metallocene catalysts useful in the invention can be represented generally by $\{(\text{ligand1})\text{-bridge-(ligand2)}\}MX_2$, wherein


ligand1, ligand2, bridge, M, and X are as previously defined and

wherein the metallocene catalyst exhibits an asymmetry parameter of 1.03 to 1.69. The metallocene catalysts provide propylene polymers as defined above.

Preferably, the catalysts exhibit one or more of

- i) a stereoregularity index between 1.30 and 10.00,
- ii) a heat of fusion (ΔH_{fus}) that is less than 50% of the ΔH_{fus} of either isotactic or syndiotactic polypropylene, and
- iii) optical clarity.

Preferably, metallocene catalysts of the invention comprise the structure



wherein ligand1 and ligand2 are different and are selected from the group consisting of fluorenyl, indenyl, 4,5-dihydrocyclopentaphenanthryl, and cyclopentaphenanthryl, optionally having substituents as described above, *bridge* is selected from the group consisting of C_2H_4 , $SiPh_2$ and $Si(CH_3)_2$, M is Zr, X is individually selected from the group previously defined, and the catalyst asymmetry parameter is between 1.03 and 1.50.

Preferably, metallocene catalysts comprise various substituent groups on the ligand rings, typically alkyl or alkenyl groups, preferably $C_1 - C_{20}$ alkyl, are placed near the metal-containing reactive center in the catalyst (*i.e.*, within 5 Å).

Metallocene catalysts of the present invention having asymmetry parameters between about 1.03 and 1.50 can be subdivided into two classes, designated A and B, below, depending on whether or not they possess a mirror plane of symmetry bisecting the MX_2 angle. This mirror plane is represented by σ_v (σ_v) in Figure 1.

Catalysts of Type A have such a symmetry plane. They produce novel polypropylenes whose molecular weight distributions, as assessed by gel permeation chromatography (GPC) of toluene solutions, typically are monomodal. These polymers are syndiotactic-rich, that is $\%rr > \%mm$, and they are optically clear and transparent. They may be noncrystalline or only slightly crystalline. That is, they may either exhibit no melt endotherm by differential scanning calorimetry (DSC) analysis or may exhibit an endotherm corresponding to less than 50% crystallinity, preferably less than 40% crystallinity.


The percentage of crystallinity of an isotactic-rich polypropylene approximately equals the ratio of the observed heat of fusion (ΔH_{fus}) to the literature heat of fusion of 100% crystalline isotactic polypropylene. The percent crystallinity of a syndiotactic-rich polypropylene is calculated similarly but using instead the literature value of ΔH_{fus} for 100% crystalline syndiotactic polypropylene. Furthermore, polypropylenes of the invention can exhibit melting transitions at temperatures at least 50° C below the melting temperature for any known purely crystalline form of polypropylene. All show a glass transition at about 0° C, consistent with a substantially noncrystalline character. In addition, the X-ray diffraction (XRD) patterns can show weak, sharp lines due to a very minor crystalline component superimposed upon a broad, structureless peak arising from the predominant, noncrystalline component.

Depending on the catalyst design and polymerization conditions (see below), the *rr* content of polypropylenes of the invention resulting from use of Type A catalysts can range from about 35% to greater than 65%. Stereoregularity indices can vary between 1.30 and 10.00 preferably in the range of 1.30 to 7.00, and most preferably 1.80 to 6.30. These polymers are soluble in toluene at room temperature. Films made by the latter technique are transparent, elastomeric and show no evidence of haze. It is now appreciated that the properties of the propylene polymers such as modulus, particularly modulus at 150°C, crystallinity, and tensile strength, are very sensitive to, and increase sharply with, small changes in *rr* content. This has not been taught in the prior art.

The weight average molecular weight of the polymers of the invention can be in the range of 70,000 to 1,000,000 preferably 80,000 to 750,000.

When the weight average molecular weight of these polymers is between about 70,000 and 200,000, more preferably 80,000 to 200,000, and when the S.I. is in the range of 2.5 to 4.0, preferably about 3.0, the materials are both elastic and tacky. They may be used, *e.g.*, to make pressure sensitive adhesives.


As molecular weight increases, an unexpected property, resistance to flow at elevated temperature, develops in these elastomers. As an illustrative example, a novel polypropylene having an S.I. of 2.6 was prepared using the metallocene catalyst {CPA-C₂H₄-flu}ZrCl₂ (A.P. = 1.08) (I) (referred to in Table 1, below, as 18Q).

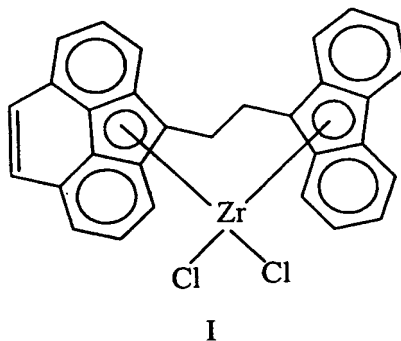

This compound has one ligand in which a vinylene or -CH=CH- "strap" joins the 4 and 5 positions of a fluorene ring group, which has the systematic name 4H-cyclopenta{d,e,f}phenanthrene, abbreviated as CPA. In Fig. 4, it can be seen that dynamic mechanical analysis of the resulting polypropylene shows that the polymer resists flow up to about 170° C. The curve relating storage modulus (E') and

temperature exhibits a broad, rubbery plateau between about 25° C and 170° C. One interpretation of the DMA spectrum can be that the material behaves as though it were crosslinked or contained a hard structural, load bearing phase in a softer continuous matrix. However, the polymer is completely soluble in toluene at room temperature, which is inconsistent with crosslinking, and it exhibits neither a melt endotherm nor sharp X-ray diffraction lines, which indicates the absence of crystallinity. In contrast, both atactic polypropylene and commercial syndiotactic polypropylene begin to flow at about 100° C. The shear modulus is 6.0×10^5 Pa between 25 and 150° C and is much higher than that of atactic polypropylene, 3.0×10^5 Pa at 150° C. The polymer is highly elastic and exhibits only a 4.5% inelastic deformation after 10% of strain (ASTM D1774-90).

As polymer stereoregularity increases, room temperature shear storage modulus (E') increases significantly. For example, a novel polypropylene prepared using the novel metallocene catalyst $\{H_2CPA-SiMe_2-flu\}ZrCl_2$ (II) (the abbreviation H_2CPA indicates hydrogenation of the vinylene "strap" of CPA), having an A.P. of 1.13 (18T, below), yields polypropylene having an *rr* content of 59% and an S.I. of 5.9.

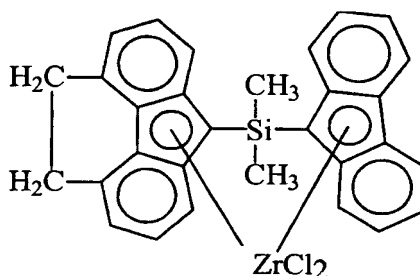

II

The subtle changes in catalyst design lead to a polymer that is considerably stiffer at room temperature, with a E' value for pressed films of 13.0×10^6 Pa. It exhibits a melt endotherm at 48° C; the heat of fusion, 12 J/g, corresponds to a crystallinity content of 12/50 or 24 weight % (50 J/g is the literature heat of fusion (ΔH_{fus}) of totally syndiotactic polypropylene). The crystallinity is due to small amounts of an oriented syndiotactic polypropylene phase. Significantly, both DSC and X-ray diffraction show that the crystalline phase has disappeared at a temperature of about 60° C, yet a plot of E' versus temperature (Figure 5) again demonstrates a broad, rubbery plateau, with a value of 2.20×10^6 Pa, from about 50° to about 170° C, at which

temperature the material begins to flow. Between 50° and 170° C, the plot of E' versus temperature strongly resembles that of Fig. 4, trace A, 18Q, in Table 2, below, where the polypropylene had an S.I. of 2.8. Therefore, resistance to flow at elevated temperatures displayed by these two polymers cannot be attributed to crystallinity, the presence of which has heretofore been assessed, as it is here, by DSC and X-ray diffraction. Without wishing to be bound by theory, it is proposed that this phenomena, which to our knowledge has never before been reported for non-crystalline polypropylene, may be due to nanocrystallinity, that is, crystalline or structurally-ordered domains that are very much smaller, perhaps 150 Å, than has previously been considered as important. Small angle light scattering experiments disclose that additional orientation of large crystallites (i.e., those melting at about 48°C) in this polymer may be achieved by stretching and which diffract X-rays.

This polymer is exceptionally elastic and exhibits essentially no inelastic deformation following extension to 10% strain. The presence of a low-melting component confers heat sealability upon the polymer. Films of the material may be fused together above about 50° C.

Raman spectra can be used to characterize the hybrid nature of propylene polymers. Spectra in the 200-500 cm⁻¹ skeletal stretching region are shown in Fig. 6. Atactic polypropylene (Example 18A below) has a broad scattering peak at about 400 cm⁻¹ and crystalline syndiotactic polypropylene (Example 18E) has a sharp peak at 313 cm⁻¹. The spectra of polymers from (Examples 18 N and 18 T, below) show bands at both about 400 and 310 cm⁻¹ due both heterotactic and homotactic sequences, respectively, in the same chain. That is, a single chain, if it were extracted from the polymer mass, would be seen to contain both types of sequences.

Table 7, below, summarizes some of the physical properties of polypropylenes obtained with the novel catalysts of the invention.

A noteworthy result is that crystallinity (as detected by DSC and XRD) is present generally when the S.I. index is about 3.9 or greater.

Table 2, below, presents data that show how S.I. (and % *rr* content) change with catalyst design and with polymerization conditions: It reveals how changes in catalyst structure and polymerization temperature may be used to change the polymer stereoregularity index and polymer physical properties.

Several trends can be found:

(1) Connecting the 4 and 5 positions of a fluorene ligand (*i.e.*, dihydrocyclopentaphenanthrenes of Examples 18S, 18T, and 18U, below) via a -CH₂-CH₂- unit provides a catalyst that is more stereoregulating (higher S.I. and % *rr* content) than one having a -CH=CH- unit in the same position (*i.e.*, cyclopentaphenanthrenes of Examples 18Q and 18R). Both groups are more effective in controlling stereoregularity than is a single methyl group at the 4 position (18W) or even two methyl groups at the 4 and 5 positions as found, for example, in compounds having the general formula shown in Table 2 but in which the 4,5-dimethylfluorenyl group replaces (strap)flu;

(2) Stereoregularity and polymer molecular weight both decrease with increasing polymerization temperature (Examples 18Q₁ vs. 18Q₂; 18T₁ vs. 18T₂; 18S₁ vs 18S₂); the temperature effect on M_w is much larger than on S.I.;

(3) Otherwise identical metallocenes with a SiMe₂ bridge connecting the two ligands (Examples 18R, 18T, and 18U) wherein Me = methyl are more stereoregulating than those having a -CH₂-CH₂- bridge (18Q and 18S);

Small changes in stereoregularity index (and % *rr* content) bring with them substantial changes in polymer properties, as explained above. Thus, catalysts of the invention make possible synthesis of a wide variety of new polypropylenes whose %*rr* content varies from 29 to 73%, preferably 29 to 65%, a range of 36% when considering both Type A and Type B catalysts. This is in advantageous contrast with prior art catalysts, which enabled a range of only 8% (from 74-82%) in *rr* content (U. S. Patent No. 5,459,218).

The pentad intensities of polypropylenes produced by Type A metallocenes of the invention can be described in terms of a single catalytic site. They follow Bernoullian statistics based upon a single, unique value of P_r, the probability of obtaining a syndiotactic insertion each time a propylene monomer is added to the growing polymer chain. P_r values can be used in a Monte Carlo calculation to determine the length distributions of all-*r* sequences and their weight percent abundances.

Metallocenes of type B have the general structure {R¹-ligand1-bridge-ligand2}ZrCl₂, wherein ligand1, ligand2, bridge, and R¹ have been previously defined.

The mirror plane of symmetry bisecting the Cl-Zr-Cl angle is absent in Type B metallocenes; in fact, these metallocenes have C_1 point group symmetry. The microstructure of polymers obtained using Type B metallocenes of the invention, as deduced from ^{13}C NMR analysis, cannot be described in terms of a single catalytically active site.

Polypropylenes obtained using Type B catalysts of the invention can be either syndiotactic- or isotactic-rich. They are elastomeric but lack the resistance to flow at elevated temperatures found in high molecular weight polymers obtained using Type A catalysts. Table 3 summarizes results obtained using Type B catalysts. It can be seen that the polymer microstructure, *i.e.* whether syndiotactic- or isotactic rich, appears to vary unpredictably depending on the nature of the substituent on the indenyl ring and, more surprisingly, on the nature of the bridging moiety connecting the indenyl and fluorenyl moieties of the ligand. Unlike the polypropylene elastomers prepared by Collins et al. (*supra*), which had a *mmmm* content of 38% or greater, the maximum *mmmm* content in elastomeric polymers prepared using catalysts of the invention is 31%, and the *mm* triad content was in range of 24 to 50 percent. This indicates that materials have been obtained that are distinguishable and very different.

Polymers listed in Table 3, below, also exhibit large polydispersity (PD) values (*i.e.*, greater than 2.5), that is, the weight average molecular weight M_w divided by the number average molecular weight M_n . In fact, GPC analysis discloses that the molecular weight distributions of polymers obtained using Type B catalysts are actually bimodal and in the case of catalysts 18B and 18I, possibly trimodal. In Table 3, the values given in parentheses represent the percent composition of each major constituent. That is, these catalysts appear to produce two different kinds of polypropylene. The two kinds are differentiable by their distribution of molecular weights and peak molecular weights, M_p . Neither of the two kinds of polymers corresponds to a highly stereoregular, *e.g.*, crystalline, component because all of the polymers are soluble in or completely extractable by hydrocarbons such as toluene or heptane. In other words, the two kinds of polypropylene produced by a given catalyst of the invention cannot be fractionated according to solubility. Lack of significant levels of crystallinity is affirmed by the transparency of pressed films of the novel polymers.

A particularly interesting elastomer is produced using the class B metallocene {ind-C₂H₄-flu}ZrCl₂ (Examples 3, 4 and 18N). It has a tensile strength at break and modulus (at small strain) of 718 and 2300 KPa, respectively. The material is exceptionally elastic or stretchy: elongations without break of 4,000% or more were achieved and a maximum elongation of 5200% has been achieved and the sample did not break. U. S. Patent No. 5,595,080 describes a different homopolymer of propylene obtained by a catalyst of a different class having an ultimate elongation of 3000% that was reported as the highest known value for elongation.

This invention also encompasses heteropolymers, that is, co-polymers of propylene with up to 25 mole per cent of 1-olefins containing up to 18 carbon atoms, such as 1-hexene, 1-octene or 1-octadecene, which serve to render the polymers softer and more flexible, lower the glass transition temperature, or to facilitate their flow and extrusion at elevated temperatures. One or more tackifiers known in the art may be added to the polymers in order to lower their glass transition temperatures. Two or more polymers of this invention may be mixed together to provide blends having intermediate properties. A similar result can be achieved by polymerizing propylene, along with optional comonomers as described above, in the presence of two or more catalysts of this invention. Additionally, various antioxidants, such as Irganox 1010™, may be added to enhance thermal stability of the polymers.

Metallocenes of the type {ligand1-bridge-ligand2}MX₂ require treatment with an activating cocatalyst in order to produce an active catalyst. When X is CH₃, CH₂C₆H₅ or other alkyl or aralkyl groups, (C₆H₅)₃C(+) salts of various noncoordinating anions can be used. Also useful are onium salts of the type R⁵R⁶R⁷QH(+), wherein Q = N or P, and R⁵, R⁶, and R⁷ can be the same or different and are selected from the group consisting of C₁ - C₂₀ straight-chain group or branched alkyl group, C₆ - C₂₀ aryl, and C₃ - C₈ cycloalkyl groups. Illustrative are (n-C₄H₉)₃NH(+), PhN(CH₃)₂H(+) and Ph₃PH(+). Effective noncoordinating anions include, but are not limited to, (C₆F₅)₄B(-), (C₆F₅)₃BCH₃(-) and B₁₁CH₁₂(-).

When X = halogen, the preferred activator compound is an aluminoxane. Aluminoxanes are prepared by the partial, controlled hydrolysis of trialkylaluminums, See, for example, U.S. Patent No. 4,752,597, col. 10, line 6 ff. Particularly preferred is methylaluminoxane, (CH₃AlO)_x which is obtained by controlled hydrolysis of trimethylaluminum. Unreacted trimethylaluminum may be removed from

commercially available methylaluminoxane by vacuum distillation or other methods known in the art, but such removal may not be necessary in order to obtain highly active catalysts. Indeed, trialkylaluminum compounds may be optionally added to the catalyst solution or monomer to scavenge harmful impurities such as adventitious oxygen or water. Methylaluminoxane can be used in excess so that the Al:M (wherein M = Zr or Hf) ratio is 2:1 to 2000:1 with the preferred range being 10:1 to 1000:1.

The active catalyst is prepared by combining the metallocene and the activator component in a nonreactive solvent such as toluene or xylenes and, optionally, nonreactive hydrocarbons such as heptane or cyclohexane. The active catalyst may be used directly or it may be impregnated onto a solid carrier such as silica. It is also possible to combine two or more metallocenes and to then treat this mixture with an activator component and to produce in this way a catalyst blend that, when contacted with propylene, will produce a polymer blend.

It has been found that polymer properties such as stereoregularity and molecular weight are greatly affected by the propylene concentration in the polymerizing reaction mixture and also by how it changes during the course of the reaction. Thus, although catalysts of this invention may be used under a wide variety of conditions, they are preferably used to prepare polypropylene in the absence of solvent. Propylene then serves as both monomer and diluent; its initial concentration, about 12M, changes little until high conversions to polymer have occurred. This was the case in Examples 4 and 18N, below.

Polymerization may be carried out as a batchwise slurry, solution or bulk reaction, or as a continuous process. In continuous polymerization, propylene, comonomer (if any) (as described above), and catalyst are continually supplied to a reactor in amounts equal to those removed from the reaction zone in the product stream. When the catalyst is supported on a solid carrier, gas phase polymerization in a fluidized bed can be conducted.

Processes for preparation of polypropylene in which no solvent is added, i.e., in which propylene serves as both monomer and diluent, are preferred. When solvents are used, preferably they are hydrocarbons, more preferably toluene or cyclohexane. Polymerization to produce new polypropylenes of this invention may be carried out at a pressure of 69 to 6890 Kpa (about 10-1000 psi). A wide range of reaction temperatures is possible but the range -20° to about 120° C is preferred. Optionally, hydrogen gas

may be added to modify the product molecular weight. For example, as is known in the olefin-polymerization art, controlled addition of hydrogen gas to a catalytic olefin polymerization reaction can lower the molecular weight of the polymer thus obtained, relative to the same polymerization procedure carried out in the absence of hydrogen.

See, for example, U.S. patent No. 3,051,690, entire document, particularly Examples 1-32.

After processing at elevated temperatures, e.g., pressing films at about 170°C, mechanical strength develops at rates dependent on thermal treatment. The process may be hastened by brief cooling, e.g., in ice water, or by passing the polymers over a chill roll or by the addition of a small amount of crystallization aid such as Millad™ 3905 (Milliken Chemical Co., Spartanburg, NC).

Unsymmetrical metallocenes, *i.e.*, those having an A.P. greater than 1.03, can be prepared using dissimilar ligands, *e.g.*, ligand1 and ligand2. Such metallocenes containing an -SiMe₂- bridge may be prepared from the reaction of a compound such as {ligand1}SiMe₂C1 (prepared as described in U.S. Patent No. 5,026,798, Example C, Part 2) with the conjugate base of ligand2.

The present invention also describes a novel process for the synthesis of compounds of the type H{ligand1-C₂H₄-ligand2}H. For example, 2-(9-fluorenyl)ethanol, abbreviated as H{flu-CH₂-CH₂-OH}, in a hydrocarbon solvent such as toluene, heptane or cyclohexane or mixtures of such solvents, is treated with exactly one equivalent of a base having sufficient basicity to deprotonate the hydroxyl group. *n*-Butyllithium is preferred. Next, reaction with a highly fluorinated alkyl sulfonyl fluoride wherein alkyl has 1 to 20 carbon atoms, preferably a perfluoroalkyl sulfonyl fluoride R_fSO₂F wherein R_f is an alkyl group having 1 to 20 carbon atoms, *e.g.*, trifluoromethanesulfonyl fluoride, yields H{flu-CH₂-CH₂-OSO₂R_f}. In a second step, the conjugate base of ligand2 is used to displace R_fSO₃⁻. Thus, for example, reaction of flu-C₂H₄-OSO₂CF₃ with the lithium salt of cyclopentaphenanthrene produces 1-(9-fluorenyl)-2-(cyclopentaphenanthrenyl)ethane which can be abbreviated as H{CPA-C₂H₄-flu}H.

In the above reaction sequence, R_f is independently selected from the group consisting of highly fluorinated or perfluorinated alkyl radicals.

The R_f alkyl group may contain from 1-20 carbon atoms, with 1-12 carbon atoms preferred. The R_f groups chains may be straight, branched, or cyclic and

preferably are straight. Heteroatoms or radicals such as divalent oxygen, trivalent nitrogen or hexavalent sulfur may interrupt the skeletal chain, as is well recognized in the art. When R_f is or contains a cyclic structure, such structure preferably has 5 or 6 ring members, 1 or 2 of which can be heteroatoms. The radical R_f is also free of ethylenic or other carbon-carbon unsaturation: *e.g.*, it is a saturated aliphatic, cycloaliphatic or heterocyclic radical. By "highly fluorinated" is meant that the degree of fluorination on the chain is sufficient to provide the chain with properties similar to those of a perfluorinated chain, *i.e.*, at least 75 percent fluorination. More particularly, a highly fluorinated alkyl group will have more than half the total number of hydrogen atoms on the chain replaced with fluorine atoms. Although hydrogen atoms may remain on the chain, it is preferred that all hydrogen atoms be replaced with fluorine to form a perfluoroalkyl group, and that any hydrogen atoms beyond the at least half replaced with fluorine that are not replaced with fluorine be replaced with bromine and or chlorine. It is more preferred that at least two out of three hydrogens on the alkyl group be replaced with fluorine, still more preferred that at least three of four hydrogen atoms be replaced with fluorine and most preferred that all hydrogen atoms be replaced with fluorine to form a perfluorinated alkyl group.

Surprisingly, the trifluoromethane sulfonate prepared by the method of the present invention is stable for at least 2 days at room temperature (about 23 °C), in contrast to the previously-reported method (Rieger et al., *Organometallics* 13, 647 (1994)), wherein the same compound was obtained in a form that decomposed rapidly above 0° C.

Other perfluoroalkylsulfonyl fluorides, such as $C_4F_9SO_2F$, which is a liquid at room temperature, can be used in place of low boiling CF_3SO_2F .

Compounds of the type $H\{\text{ligand1-bridge-ligand2}\}H$ can be converted into to their titanium, zirconium or hafnium dihalide complexes by methods long known in the art. As an illustrative example, reaction of $H\{CPA-C_2H_4-flu\}H$ with two equivalents of butyllithium yields the salt $Li_2(CPA-C_2H_4-flu)$ which, when allowed to react with $ZrCl_4$ or $ZrCl_4 \cdot 2(\text{tetrahydrofuran})$ or $ZrCl_4 \cdot CH_3OC_2H_4OCH_3$, affords $\{CPA-C_2H_4-flu\}ZrCl_2$. The metallocene is obtained as a finely divided powder. It may be freed from lithium chloride and other byproducts and impurities by extraction with a nonreactive solvent such as dichloromethane. However, this purification step typically is not necessary and

the crude metallocene can be used as such to prepare a catalyst. Other metal alkyls, such as butylsodium or dibutylmagnesium, or benzylpotassium, or metal hydrides such as potassium hydride may be used in place of butyllithium.

5 Polypropylenes of this invention provide thermoplastic elastomers which can be used as adhesives, binders, and films. These polymers may be used alone or admixed with fillers or adjuvants, such as carbon black, glass fibers, metal particles or whiskers, or cellulose. They may be used in combination with colorants and pigments such as iron oxide. They may be incorporated into blends with other polymers, such
10 polyhexene or polyoctene, or with crystalline or amorphous polypropylenes, or as multilayer, laminated construction with these same polymers. Amounts of adjuvants or fillers added can vary depending on the application desired.

Objects and advantages of this invention are further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this
15 invention.

EXAMPLES

Methylaluminoxane was obtained from Albemarle Corp., Baton Rouge, LA, as a 30% solution in toluene. This was diluted 1:2 (v/v) with dry, oxygen-free toluene
20 (vacuum distilled from triisobutyl aluminum) to produce a solution having an aluminum concentration of 1.7M.

Unless otherwise indicated, reactions were carried out in an atmosphere of dry, oxygen free nitrogen. Solvents, when used, were dried with molecular sieves or purified by distillation from sodium-benzophenone. Uncomplexed, organic ligands
25 were handled and purified in air but metallocenes, which usually exhibited some degree of sensitivity to atmospheric moisture, were purified and stored in a nitrogen-filled drybox.

Unless otherwise indicated, all chemicals were obtained from Aldrich Chemical Co., Milwaukee, WI. The compounds 1-methyl- and 1-trimethylsilylindene were
30 prepared according to the method of Ready et al., *J. Organomet. Chem.*, **21**, 519 (1996), and 1-phenylindene was prepared according to the method of Greifenstein et al., *J. Org. Chem.*, **46**, 5131 (1981).

Polymerization Grade propylene (Matheson Gas Products, Seacaucus, NJ) was passed through two Matheson model 6406A purifiers, connected in series, before use.

¹³C NMR analyses to determine microstructure of polymers at the pentad level were obtained at 100° C using 1,2-dichlorobenzene solutions of the polymers with a Varian XL-500 spectrometer (Varian Associates, Inc., Palo Alto, CA) according to the method of Tonelli, "NMR Spectroscopy and Polymer Microstructure: The Conformational Connection", VCH, Deerfield Beach, Fla. (1989).

NMR chemical shifts are expressed in ppm relative to external Me₄Si (¹H and ¹³C) or CFCl₃ (¹⁹F), positive shifts being downfield of the reference.

Positive ion mass spectra were obtained in electron impact mode using 70 eV electron beam energy. A Finnigan FT/MS dual-cell Fourier transform mass spectrometer (Finnigan, San Jose, CA) with a 3.0 Tesla magnet was utilized to obtain the high resolution exact mass measurements. The samples were introduced into the mass spectrometer by using a direct insertion probe that was heated to 350° C. The electron impact (EI) mass spectral data was obtained using standard EI conditions. All mass spectra were acquired with a minimum resolving power of 3,000.

Number average molecular weights, M_n , weight average molecular weights, M_w , and peak molecular weights, M_p , for polymers were determined by gel phase permeation chromatography (GPC) on filtered solutions using a Waters 150C system (Waters Corp., Milford, MA) equipped with Jordi Associates Inc. (Bellingham, MA) 500A and mixed bed columns which were calibrated with polystyrene standards. Toluene at room temperature was used as solvent unless otherwise noted.

Wide angle X-ray scattering (WAXS) data was collected in a reflection geometry using a Philips vertical diffractometer (Philips Electronic Instruments Co., Mahwah, NJ) equipped with variable entrance slits, graphite diffracted beam monochromator, and proportional registry of the scattered radiation. The radiation employed was copper K alpha with generator settings of 45 kV and 35 mA. Step scans were conducted between 5 and 55 degrees (2Theta) using a 0.04 degree step size and 4 second count time. For elevated temperature scans, a similar diffractometer fitted with a platinum strip furnace and Paar HTK temperature controller (Paar, Anton, USA; Ashland, VA) was used. Software used to analyze the diffraction data was Philips PC-APD.

DSC data were obtained using a TA Instruments Model 2920 modulated differential scanning calorimeter (TA Instruments, Inc., New Castle, DE). A linear heating rate of 5° C/min was applied with a perturbation amplitude of +1° C every 60 sec. Samples were subjected to a cyclic heat-cool-heat profile ranging from
5 -120° to 200° C in a nitrogen atmosphere. Heats of fusion (ΔH_{fus}) were determined by integrating heat flow curves.

Molecular modeling programs employed CAChe™ Satellite, ProjectLeader and molecular mechanics programs (all version 3.8) (Oxford Molecular Ltd., Oxford, United Kingdom) which were run on a Macintosh computer.

10 Counterions for the catalyst can be varied as is known in the art. Metallocene catalysts can also include Ti metal centers as is known in the art.

Example 1

2-(9-fluorenyl)ethyl trifluoromethane sulfonate.

15 A 2.5M solution of n-butyllithium in hexane was added with stirring to 5 g 2-(9-fluorenyl)ethanol, flu-CH₂-CH₂-OH (prepared by the method disclosed in *Organometallics* 13, 647 (1994)), in 90 mL toluene. Addition was terminated when the reaction mixture became light orange; about 10 mL was required. The resulting solution of Li{flu-CH₂-CH₂-O} was cooled in a dry ice-acetone bath and 3.8 g
20 trifluoromethanesulfonyl fluoride, CF₃SO₂F (prepared according to U. S. Pat. 2,732,398, Example 1), was added by vacuum transfer. After warming to room temperature, any unreacted CF₃SO₂F was removed by pumping. The desired compound was obtained as a colorless oil, 7.7 g (95%) by filtration of the reaction mixture followed by evaporation of solvents. Spectroscopic and chemical analysis confirmed
25 the identity of the desired compound.

Example 2

{flu-C₂H₄-ind}

1-(9-fluorenyl)-2-(1-indenyl)ethane

30 To a solution of 21.0 g 2-(9-fluorenyl)ethanol, in 495 mL toluene was added dropwise with stirring 40 mL of a 2.5M solution of n-butyllithium in hexane. The resulting solution of Li{flu-CH₂-CH₂-O} was cooled to below -25° C. Then, 16.7 g

CF₃SO₂F was condensed into the reaction mixture. The temperature was allowed to rise to 25° C and the reaction mixture was stirred for 6 h. Unreacted CF₃SO₂F was removed by pumping about 10 mL of liquid into a dry ice-cooled trap. To the solution of flu-CH₂-CH₂-OSO₂CF₃ thus obtained was added a solution of 0.1 mole indenyllithium in 100 mL diethyl ether. After stirring for 12 h, solvents were removed under vacuum and the residue recrystallized in air from boiling heptane. The yield of white microcrystalline solid, mp 79-80° C, was 8.9 g (29%). Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 3

{flu-C₂H₄-ind}ZrCl₂ (designated 18N in Table 1, below)

A solution of 1.54 g 1-(9-fluorenyl)-2-(1-indenyl)ethane (Example 2) in 70 mL diethyl ether was treated with 4 mL 2.5M n-butyllithium in hexane. The resulting orange solution was stirred overnight, after which solvents were pumped away on a vacuum line. Zirconium chloride (1.17 g) and 75 mL hexane were added. The reaction mixture was vigorously stirred for 18 h then filtered. The solids were extracted with 350 mL dichloromethane. The filtered extract was evaporated and the residue slurried with 10 mL portions of 1:1 (v/v) dichloromethane-hexane to produce 0.61 g (26%) bright orange, powdery product that was collected on a filter and vacuum dried. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 4

Propylene Polymerization using {flu-C₂H₄-ind}ZrCl₂.

A 0.017 g quantity of {flu-C₂H₄-ind}ZrCl₂ (Example 3) was dissolved in 16 mL methylaluminoxane solution. After 1 h, the solution was diluted with 10 mL toluene and transferred to a 100 mL stainless steel cylinder fitted with a valve. The cylinder was pressurized to about 5520 KPa (800 psi) with nitrogen gas, inverted and attached to a reactor containing 1816 g propylene at a temperature of 8° C. This reactor had a volume of about 8 L and was equipped with a thermocouple, an agitator and a jacket through which coolant could be circulated as needed in order to control the polymerization temperature. It was evacuated with a vacuum pump then backfilled with nitrogen prior to charging with propylene. Upon opening the cylinder valve, the

catalyst solution was injected into the reactor. Over a 1 h period, the temperature rose to 28° C and was maintained at that temperature for 4 more hours. Then, the reaction was terminated by venting unreacted propylene. The yield of polymer was 533 g. ¹³C NMR analysis: 8.7% *mmmm*, 9.4% *mmmr*, 7.6% *rmmr*, 17.3% *mmrr*, 10.3%
5 *rmrr/mmr*, 3.8% *rmm*, 22.0% *rrrr*, 14.1% *mrrr*, 6.9% *mrrm*, 25.7% *mr*, 31.4% *mr* and 43.0% *rr*. Spectroscopic and chemical analysis confirmed the identity of the desired product.

Example 5

{flu-C₂H₄-ind}HfCl₂

10 A solution of 1.54 g flu-C₂H₄-ind (Example 2) in 70 mL diethyl ether was treated dropwise with 4 mL 2.5 M n-butyllithium in hexane. The reaction mixture was stirred overnight, after which solvents were removed under vacuum. A slurry of 1.6 g HfCl₄ in 75 mL hexane was added and the reaction mixture was stirred for an additional
15 72 hours at 23° C, then filtered. Retained solids were extracted with 300 mL dichloromethane, and the extracts were evaporated to give a crude solid that was washed with five 20 mL portions of hexane, 20 mL 2:1 hexane:dichloromethane, then 20 mL hexane. After vacuum drying, the orange powdery solid product, {flu-C₂H₄-ind}HfCl₂, weighed 1.32 g (47%).

20 Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 6

CPA-SiMe₂-flu.

25 A solution of lithium cyclopentaphenanthrene (Li(CPA)) was prepared by adding 6.0 mL 2.5M n-butyllithium in hexane to 2.85 g cyclopentaphenanthrene dissolved in 50 mL tetrahydrofuran. The reaction mixture was stirred for 12 hr then treated with a solution of 3.87 g (9-fluorenyl)dimethylchlorosilane, flu-SiMe₂Cl (prepared according to the method of U. S. Patent No. 5,026,798, Example C), in 50
30 mL diethyl ether. After stirring overnight, 1.5 mL methanol was added. Solvents were removed under vacuum and the residue extracted with dichloromethane. The extracts were filtered through diatomaceous earth, 10 mL heptane was added, and the solution

then slowly concentrated on a rotary evaporator. After nearly all the dichloromethane had been removed, the product separated as a white microcrystalline solid that was isolated by filtration. The yield was 3.9 g (63%), mp 153-154° C. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

5

Example 7

{CPA-SiMe₂-flu}ZrCl₂ (designated Example 18R, below)

Li₂{CPA-SiMe₂-flu} was prepared by treating a solution of 1.65 g CPA-SiMe₂-flu (prepared as in Example 6) in 40 mL diethyl ether with 3.2 mL 2.5M butyllithium in hexane. After stirring overnight, solvents were removed on a vacuum line. Zirconium tetrachloride (0.93 g) was added and the mixture cooled to -79° C with a dry ice-acetone bath. Dichloromethane, 75 mL, precooled to -78° C, was added and the reaction mixture was vigorously stirred overnight as the cooling bath warmed to room temperature. The red solid phase was separated and extracted with five 100 mL portions of dichloromethane. The filtered extracts were evaporated and the residue was washed with hexanes to give 0.48 g (24%) red microcrystals. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

10

15

Example 8

Copolymerization of Propylene and 1-Octene.

20

25

A catalyst prepared by stirring 0.018 g {CPA-SiMe₂-flu}ZrCl₂ (Example 7) and 21 mL methylaluminoxane solution was added to a mixture of 48 g 1-octene and 1816 g propylene which were contained in the reactor as described in Example 4. The polymerization temperature was maintained between 15° and 20° C for 4 h, after which the reaction was terminated. The copolymer product weighed 950 g and contained 1.1 wt. % (0.4 mole %) octene. ¹³C NMR analysis showed 4.6% *mmmm*, 8.6% *mmmr*, 6.2% *rmmr*, 12.6% *mmrr*, 19.1% *rmmr/mmrmm*, 9.5% *rmrm*, 20.6% *rrrr*, 14.2% *mrrr*, 4.6% *mrrm*, 19.4 % *mm*, 41.2% *mr* and 39.4% *rr*. Spectroscopic and chemical analysis confirmed the identity of the desired product.

30

Copolymers of propylene and ethylene, butene, hexene or mixtures thereof can be prepared as in this Example by substituting one or more of them for the octene used herein.

Example 9

Dihydrocyclopentaphenanthrene, H₂CPA.

A mixture of 2 g cyclopentaphenanthrene, 0.2 g 10% palladium on carbon and 50 mL toluene was stirred under hydrogen (69 kPa) until hydrogen uptake ceased, about 48 h. Catalyst was removed by filtration through diatomaceous earth and the filtrate evaporated. The crude product remaining weighed 1.97 g. It was further purified by recrystallization from heptane at -40° C to give 1.8 g colorless plates. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 10

{H₂CPA-SiMe₂-flu}ZrCl₂ (designated 18T in Table 1, below)

H₂CPA-SiMe₂-flu was prepared from dihydrocyclopentaphenanthrene (Example 9) and 9-flu-SiMe₂Cl by the method described in Example 6. The crude product was recrystallized by slow rotary evaporation from solution in dichloromethane - acetone. The yield of white powdery solid, mp. 155-156° C, was 58%. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

This compound was converted to the metallocene catalyst {H₂CPA-SiMe₂-flu}ZrCl₂ by the method described in Example 3. The mass spectrum showed a cluster of molecular ions having the correct distribution of Cl and Zr isotopomers.

Example 11

{2-Methylbenzindene-C₂H₄-flu}ZrCl₂ (designated 18D in Table 1, below)

A mixture of isomeric 2-methylbenzindenes was prepared by the method described by Stehling et al., *Organometallics*, 13, 964 (1994). A solution of 3.6 g of this material was dissolved in 90 mL diethyl ether and converted to the lithium salt by dropwise addition of 8 mL 2.5M butyllithium in hexane. This was added to 20 mmole flu-CH₂-CH₂-OSO₂CF₃ (Example 1) in 100 mL toluene. After stirring overnight, the reaction mixture was filtered and evaporated. The residual gum was extracted with 300 mL boiling heptane. The extract was cooled to -5° C and the yellow solids which separated were collected on a filter. Further purification of the solids was carried out by chromatography on an 20.3 x 3.8 cm silica gel column, eluting with 1:1 (v/v)

toluene - heptane. Evaporation of the eluate gave 3.6 g crude methylbenzindene-C₂H₄-flu as an amber resin.

5 A 3.48 g quantity of this crude adduct was dissolved in 50 mL ether and treated with 7.5 mL 2.5M butyllithium in hexane. After stirring overnight, most of the liquid phase was removed with a hypodermic syringe. The residue was dried by pumping on a vacuum line then washed with hexane, after which 50 mL hexane and 0.98 g zirconium tetrachloride were added. After stirring for 48 h, the reaction mixture was filtered and the solids extracted with five 50 mL portions of dichloromethane. The filtered extracts were evaporated and washed with hexane to leave 0.73 g of product as a bright orange powder. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 12

Propylene Polymerization with {2-Methylbenzindene-C₂H₄-flu}ZrCl₂

15 A catalyst solution was prepared by stirring 0.04 g of the metallocene catalyst obtained in Example 11 with 15 mL methylaluminumoxane solution. The catalyst solution was injected into 1816 g propylene held at 8° C. After 40 min, the temperature inside the reactor had risen to 26° C and maintained at that temperature for 4.5 h, after which the polymerization reaction was terminated. The yield of polymer product was 1534 g.

20 ¹³C NMR analysis gave 30.9% *mmmm*, 14.2% *mmmr*, 4.9% *rmmr*, 16.2% *mrrr*, 8.3% *rmrr/mrrm*, 3.7% *rmrm*, 7.1% *rrrr*, 7.8% *mrrr*, 7.8% *mrrm*, 50.0% *mm*, 28.2% *mr* and 21.8% *rr*. Spectroscopic and chemical analysis confirmed the identity of the desired product. The polymer was extracted with hot heptane (at about 95°C) in a Soxhlet apparatus. No material remained unextracted. Recovery was about 95% with 5% attributed to mechanical losses. The ¹³C NMR spectrum of the recovered polymer

25 matched that of the starting material within experimental error, indicating that an insoluble, crystalline phase was not present.

Example 13

{H₂CPA-C₂H₄-flu}ZrCl₂ (designated 18S in Table 1, below)

30 A slurry of Li(H₂CPA) was prepared by treating 15 mmole (2.88 g) dihydrocyclopentaphenanthrene (Example 9) in 50 mL diethyl ether with 6 mL 2.5M n-

butyllithium in hexane. Toluene, 50 mL, was added to reduce the viscosity. This slurry was added to 15 mmole flu-CH₂-CH₂-OSO₂CF₃ in 75 mL toluene (Example 2). The desired adduct, H₂CPA-C₂H₄-flu was obtained as colorless crystals. After recrystallization from CH₂Cl₂-acetone 50% yield was obtained. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

The adduct was converted to the metallocene {H₂CPA-C₂H₄-flu}ZrCl₂ by the method described in Example 3. The yield of carmine colored microcrystals was 50%. Spectroscopic and chemical analysis confirmed the identity of the desired compound.


Example 14

Propylene Polymerization using {H₂CPA-C₂H₄-flu}ZrCl₂.

A. Polymerization at 68° C. A catalyst prepared by stirring 0.022 g {H₂CPA-C₂H₄-flu}ZrCl₂ with 15 mL methylaluminoxane solution was added to 1816 g propylene at 1° C, according to the method described in Example 4. Within 7 min, the temperature rose to 23° C and circulation of coolant was started. The temperature continued to rise until it reached 68° C, then declined slowly. After about 3 h, the reactor was vented and 1435 g colorless, tacky, elastic polypropylene was removed. ¹³C NMR showed 2.4% *mmmm*, 6.0% *mmmr*, 5.7% *rmmr*, 12.2% *mmrr*, 20.8% *rmrr/mmr*, 10.7% *rmrm*, 20.8% *rrrr*, 15.8% *mrrr*, 5.7% *mrrm*, 14.0% *mm*, 43.8% *mr* and 42.3% *rr*.

B. Polymerization at 28° C. The polymerization reaction in Run A was repeated but the amount of metallocene used was reduced to 0.008 g. The reaction temperature was kept at about 28° C by circulation of coolant through the jacket surrounding the reactor. After 3 hr, unreacted propylene was vented and 1748 g nontacky, elastic polymer was removed from the reactor. ¹³C NMR analysis showed 0.9% *mmmm*, 3.3% *mmmr*, 6.0% *rmmr*, 11.4% *mmrr*, 12.3% *rmrr/mmr*, 4.8% *rmrm*, 42.0% *rrrr*, 17.1% *mrrr*, 2.2% *mrrm*, 10.2% *mm*, 28.5% *mr* and 61.3% *rr*. Spectroscopic and chemical analysis confirmed the identity of the desired product.


Example 15



The ligand CPA-C₂H₄-flu was obtained as colorless needles from toluene-heptane, m.p. 225-227° C, in 51% yield by the reaction of the lithium salt of cyclopentaphenanthrene with flu-C₂H₄-OSO₂CF₃ according to the method described in Example 2. Spectroscopic and chemical analysis confirmed the identity of the desired compound.


A 1.0 g quantity of the above adduct, suspended in 50 mL ether, was treated with 2.1 mL 2.5M butyllithium in hexane. After 12 h, solvents were removed on a vacuum line. Solid hafnium tetrachloride, 0.83 g and 50 mL hexane were added. The reaction mixture was stirred vigorously for 24 h. The finely divided, crude, orange product was isolated by centrifugation and washed with hexane then toluene and vacuum dried. The yield was 0.8 g. The metallocene was used without further purification in subsequent polymerization reactions. Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 16



A 0.025 g quantity of the metallocene obtained in Example 15 was stirred for 38 min with 18 mL methylaluminoxane solution. This mixture was added to 1816 g propylene held at 0° C. The reactor was allowed to warm to room temperature, then vented and opened. The polymer thus obtained, 43 g, was removed. ¹³C NMR analysis gave 4.4% *mmmm*, 6.3% *mmmr*, 5.7% *rmmr*, 12.3% *mmrr*, 15.9% *rmrr/mmr*, 8.4% *rmrm*, 27.7% *rrrr*, 14.1% *mrrr*, 5.2% *mrrm*, 16.4% *mm*, 36.6% *mr* and 47.0% *rr*. Spectroscopic and chemical analysis confirmed the identity of the desired product. GPC analysis gave M_w 9.5E5, M_n 3.2E5, and M_w/M_n 2.84.

Example 17



To a suspension of 1.91 g CPA-C₂H₄-flu (Example 15) in 70 mL diethyl ether was slowly added 4 mL 2.5 M n-butyllithium in hexane. An orange crystalline solid separated. The reaction mixture was stirred overnight at 23° C, after which solvents

were removed in a vacuum line. The reaction flask containing the solid dilithium salt thus obtained was cooled in a acetone-dry ice bath, and 1.17 g solid ZrCl_2 was added, followed by 70 mL dichloromethane that had been precooled to

-78° C. The reaction mixture was stirred overnight as the cold bath warmed to 23° C.

The solid phase was isolated by centrifugation, then washed successively with hexane, absolute ethanol, and hexane. The bright red solid product, dried under vacuum, weighed 1.53 g (57%). Spectroscopic and chemical analysis confirmed the identity of the desired compound.

Example 18

Propylene Polymerization Reactions

Propylene was polymerized at $25 \pm 10^\circ\text{C}$ by the method described in Example 4. A 20 ± 10 mg quantity of metallocene was employed ; the exact amount was chosen so as to enable maintenance of temperature and prevent too vigorous a reaction. These catalysts, their A.P. values, and the S.I. of the product polymers, are summarized in Table 1, below. Table 2, below summarizes stereochemical and molecular weight data for some polypropylenes prepared with Class A catalysts. Table 2 also includes results from polymerization reactions carried out at higher and lower temperatures. This has been denoted by subscripts (i.e. 1 or 2) indicating reaction at different temperatures.


Table 3, below, presents stereochemical analyses of polypropylenes prepared using Class B catalysts. This Table illustrates how the stereochemical preference of these metallocenes, i.e. whether a syndio- or isotactic-rich polymer is formed, varies unpredictably with the structural details of the catalyst. The data also show bimodal molecular weight distributions and peak molecular weight, M_p , of each of the two distributions which are given in the last two columns in Table 3.

Table 1

Example		A.P.	S.I.	rr/mm
18A*	(fluorenyl-C ₂ H ₄ -fluorenyl)ZrCl ₂	1.00	1.13	23/26
18B	(fluorenyl-C ₂ H ₄ -3-phenylindenyl)ZrCl ₂	1.16	1.50	36/24
18C	(fluorenyl-C ₂ H ₄ -2-phenylindenyl)ZrCl ₂	1.16	2.73	22/60
18D	(fluorenyl-C ₂ H ₄ -2-methyl-4,5-benzoindenyl)ZrCl ₂	1.22	2.27	22/50
18E*	(fluorenyl-CMe ₂ -cyclopentadienyl)ZrCl ₂	2.09	27.30	82/3
18F	(fluorenyl-C ₂ H ₄ -3,4-benzofluorenyl)ZrCl ₂	1.18	1.33	24/32
18G	(fluorenyl-C ₂ H ₄ -4-phenylfluorenyl)ZrCl ₂	1.44	1.68	22/37
18H*	(fluorenyl-C ₂ H ₄ -4-(1-naphthyl)-2,7-di- <i>t</i> -butylfluorenyl)ZrCl ₂	1.70	13.30	6/80
18I	(fluorenyl-C ₂ H ₄ -3-methylindenyl)ZrCl ₂	1.16	1.12	29/26
18J	(fluorenyl-C ₂ H ₄ -3-trimethylsilylindenyl)ZrCl ₂	1.30	2.19	21/46
18K	(fluorenyl-C ₂ H ₄ -3-trimethylsilylindenyl)HfCl ₂	1.30	1.44	25/36
18L*	(fluorenyl-C ₂ H ₄ -2,7-di- <i>para</i> -tolylfluorenyl)ZrCl ₂	1.00	1.08	28/26
18M*	(fluorenyl-C ₂ H ₄ -2,7-di- <i>tert</i> -butylfluorenyl)ZrCl ₂	1.00	1.26	23/29
18N	(fluorenyl-C ₂ H ₄ -indenyl)ZrCl ₂	1.35	1.65	43/26
18O*	(fluorenyl-CH ₂ SiMe ₂ -fluorenyl)ZrCl ₂	1.00	1.04	25/24
18P*	(fluorenyl-SiMe ₂ -fluorenyl)ZrCl ₂	1.00	1.31	29/22
18Q	(fluorenyl-C ₂ H ₄ -cyclopentaphenanthryl)ZrCl ₂	1.08	1.84	35/19
18R	(fluorenyl-SiMe ₂ -cyclopentaphenanthryl)ZrCl ₂	1.08	2.47	42/17
18S	(fluorenyl-C ₂ H ₄ -4,5-dihydrocyclopentaphenanthryl)ZrCl ₂	1.13	6.10	61/10
18T	(fluorenyl-SiMe ₂ -4,5-dihydrocyclopentaphenanthryl)ZrCl ₂	1.13	5.90	59/10
18U	(fluorenyl-SiPh ₂ -4,5-dihydrocyclopentaphenanthryl)ZrCl ₂	1.13	5.09	56/11
18V	(perhydrocyclopentaphenanthryl-C ₂ H ₄ -perhydrofluorenyl)ZrCl ₂	1.10	3.92	51/13
18W*	(fluorenyl-C ₂ H ₄ -4-methylfluorenyl)ZrCl ₂	1.11	1.03	38/37
18X	(cyclopentaphenanthryl-SiMe ₂ -indenyl)ZrCl ₂	1.46	6.36	11/70
18Y	(3,4-Dimethylfluorenyl-SiMe ₂ -3,4-dimethylfluorenyl)ZrCl ₂	1.00	1.28	32/25
18Z*	(fluorenyl-SiMe ₂ -indenyl)ZrCl ₂	1.35	1.88	24/45
18AA	(fluorenyl-SiPh ₂ -indenyl)ZrCl ₂	1.35	1.23	37/30

* Comparative Example (both catalyst and polypropylene known in the art)


Table 2. Polypropylenes Prepared with Some Type A Catalysts

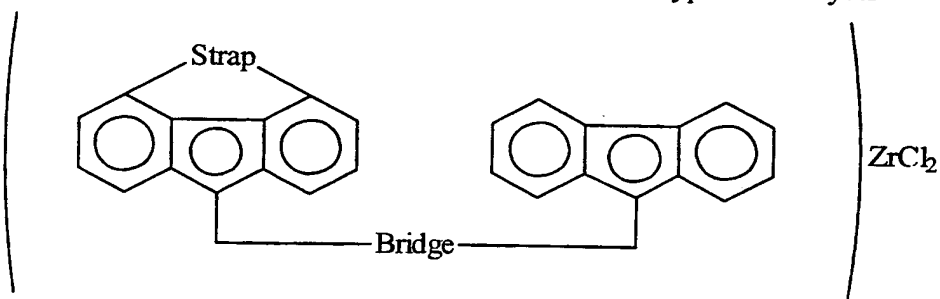

Example	Strap	Bridge	Rx Temp	% <i>rrrr</i>	% <i>rr</i> /% <i>mm</i>	M_w/M_n	PD*
18Q ₁	-CH=CH-	CH ₂ -CH ₂	-20	21	42/15	7.2E5/4.2E5	1.71
18Q ₂	-CH=CH-	CH ₂ -CH ₂	+10	16	35/19	6.3E5/3.3E5	1.3
18T ₁	CH ₂ -CH ₂	SiMe ₂	+25	40	59/10	6.6E5/4.1E5	1.6
18T ₂	CH ₂ -CH ₂	SiMe ₂	+50	34	56/11	2.9E5/1.1E5	2.6
18R	-CH=CH-	SiMe ₂	+15	25	42/17	1.4E6/4.9E5	2.85
18U	CH ₂ -CH ₂	SiPh ₂	+25	33	57/12	1.4E6/5.8E5	2.4
18S ₁	CH ₂ -CH ₂	CH ₂ -CH ₂	+65	21	42/14	8.0E4/1.9E4	4.2
18S ₂	CH ₂ -CH ₂	CH ₂ -CH ₂	+28	42	61/10	7.1E5/2.5E5	2.84


*PD means polydispersity, i.e., M_w/M_n .

Table 3. Polypropylenes Prepared with Some Type B Catalysts

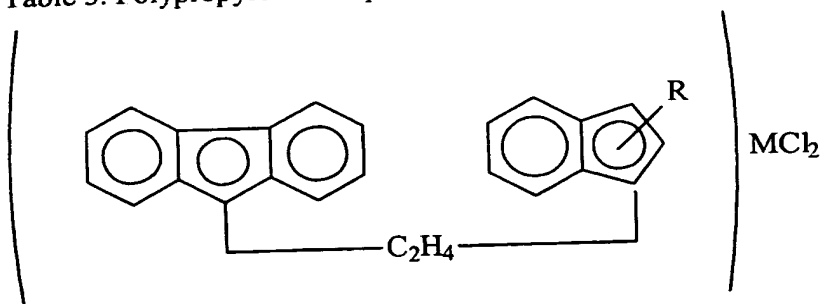

Ex.	R	M	AP	S.I.	mm:mr:rr	M_p (%)	M_p (%)
18N*	H	Zr	1.35	1.65	26:31:43	7.1E4 (20)	8.2E4 (80)
18B	3-Ph	Zr	1.16	1.50	24:41:36	6.2E5 (69)	1.3E5 (11)
18J	3-SiMe ₃	Zr	1.30	2.19	46:33:21	4.3E5 (50)	8.9E4 (50)
18K	3-SiMe ₃	Hf	1.30	1.44	36:39:25	5.1E5 (50)	8.1E4 (50)
18I	3-CH ₃	Zr	1.16	1.12	26:45:29	6.3E5 (78)	1.6E5 (18)
18D	2-Me-4,5-benzo	Zr	1.22	2.27	50:28:22	6.2E5 (100)	†

† sample had single peak

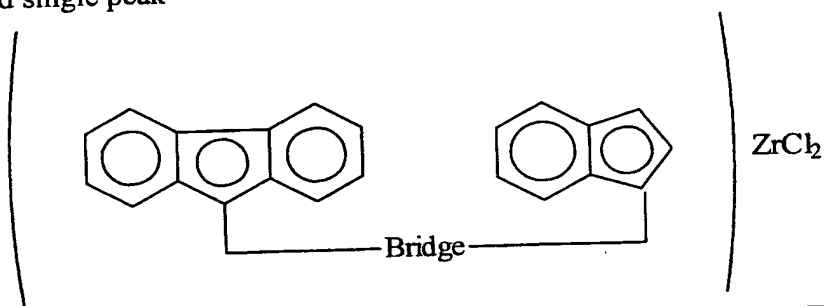

Ex.	Bridge	mm:mr:rr	A.P.	S.I.	M_p (%)	M_p (%)
18N*	C ₂ H ₄	26:31:43	1.35	1.65	7.5E5 (20)	8.2E4 (80)
18Z*	SiMe ₂	45:32:24	1.35	1.88	3.5E5 (15)	9.6E4 (85)
18AA	SiPh ₂	30:33:37	1.35	1.23	5.8E5 (76)	9.6E4 (24)

* Catalyst is known in the art

Example 19

Polypropylene Properties

Polypropylene was prepared by the method described in Example 4, using catalyst 18Q₁ ((fluorenyl-C₂H₄-cyclopentaphenanthryl)ZrCl₂), except that the reaction temperature was kept at -20° C. As shown in Table 2, the S.I. for the resulting polymer was 42/15 = 2.8, indicating that the lower-temperature reaction (compared to the

polymer resulting from the use of catalyst 18Q₂ (reaction temperature = +10° C, S.I. = 1.84) produced a polypropylene having a higher percentage of syndiotacticity.

A sample of the low-temperature polymer, from catalyst 18Q₁, was pressed into a thin film using a Carver hydraulic press (Fred S. Carver, Inc., Model 2699, Wabash, IN) by pressing at 170° C for two minutes. When cooled to 23° C, two samples of the film were subjected to Dynamic Mechanical Analysis at 1 Hz using a Rheometrics Model RSAII rheometer (Rheometric Scientific, Piscataway, NJ) at -60° C and +250° C, respectively, in order to avoid thermal equilibrium or annealing effects on transitions. Thermal expansion of the sample was compensated for by adjustment of the dynamic oscillatory strain amplitude.

Figure 4 shows the tensile storage modulus (Trace A), the loss modulus (Trace B), and the loss tangent or tan delta (Trace C), of the sample. As can be seen in Fig. 4, Trace A, the polypropylene of the invention, from catalyst 18Q₁, exhibited a sharp drop in elastic modulus between -3° and +8° C, followed by a surprising essentially flat tracing up to about 175°C, more particularly between +8° and +174°C, a property that is unprecedented for a polypropylene having no measurable gross crystallinity by WAXS or detectable melting point by DSC.

Trace B shows the loss modulus for this sample, which is a measurement of the ability of the material to dissipate heat when deformed. The slight rise in loss modulus with temperature is an indication of loss of structural order as the temperature increases, at about 180° C, an abrupt change in slope of Trace B is indicative of a physical change, such as melting. Trace C shows the ratio of loss modulus to tensile storage modulus (E''/E'), also known as tan delta, for the sample, and is wholly derived from the two previous traces.

The tensile storage modulus shown in Fig. 4 corresponding to the elastic flat plateau allows calculation of an entanglement molecular weight (\overline{M}_e) for the polypropylene of this Example of 3620 g/mole, a value less than that predicted for pure atactic polypropylene, i.e., 4650 g/mole (Z. Xu, et al., *Advances in Polymer Science*, Vol. 120, Springer Verlag, Berlin (1995), pp. 1-50).

A sample of the polypropylene of the invention was further annealed at 150°C for 60 minutes, then slowly cooled to 23° C at 1° C/minute prior DMA analysis. The DMA analysis indicated that the polymer behaved like an uncrosslinked polypropylene,

that is, fine structure that may contribute to a plateau in the elastic modulus was prevented from forming by the slow cooling process. This shows that the source of elastic behavior over an extended temperature range was not due to the relatively high molecular weight of the polypropylene alone, but was reasonably attributed to the nanocrystallinity of the sample before annealing.

This experiment shows that polypropylene prepared, for example, using catalysts 18Q, 18Q₁, 18R, 18S, 18T, 18U, of the invention exhibited physical properties that have not been described previously, that is, rubbery elastic behavior over an extended temperature range, without evidence of gross crystallinity. Without wishing to be bound by theory, it is postulated that this behavior, coupled with the calculated low entanglement molecular weight, is indicative of a near perfect infinite network structure generated by extremely fine scale crystallinity.

Example 20

Time Dependence of Modulus for Polypropylene

Polypropylene was prepared according to the method of Example 4 using catalyst 18T₁ ((fluorenyl-dimethylsilyl-4,5-dihydrocyclopentaphenanthryl)ZrCl₂; polymerization at 25° C, per Table 3). A melting point of 48° C was found via Modulated Differential Scanning Calorimetry (MDSC) methods (Model 2980, TA Instruments, Inc., New Castle DE). Analysis by WAXS methods established the presence of crystallinity in the sample by comparison with spectra of commercially-available polypropylene: Rexene™ D-100 (isotactic polypropylene from metallocene catalyst, Rexene Corp., Dallas, TX); Exxon™ 3505 (isotactic polypropylene from Ziegler-Natta catalyst, Exxon Chemicals Co., Houston, TX).

A film sample was prepared by pressing the polymer in a Carver press at 176°C, then allowing the film to cool to 23° C. The tensile storage modulus of a portion of the film was then determined over a lengthy time period by Dynamic Mechanical Analysis using a Rheometrics RSA II analyzer. Results of the analysis are shown in Table 4, below.

Table 4
Modulus as a Function of Time at 23° C

Time after preparation, hours	Tensile Storage Modulus, MPa	Loss Tangent
0.5	2.23	0.16
2.5	2.68	0.15
4.5	4.36	0.15
23	3.14	0.12
100	10.2	0.14
120	10.3	0.14

The data of Table 4 show surprising polypropylene behavior, that is, an increase in tensile storage modulus by a factor of 5 over a 5-day period while the loss tangent remained unchanged. Measurement of tensile storage modulus of the sample after aging for 28 days, using a Rheometrics RSAII instrument, revealed the data shown in Figure 5, which clearly shows the newly-developed shoulder in the trace between about 15° and 45° C, corresponding to the increase in tensile modulus shown in Table 4.

Using this first "step" modulus, an entanglement molecular weight of 545 was calculated, indicating a higher degree of structural order than shown for the final, higher temperature equilibrium tensile modulus plateau to 170°C. A higher molecular weight for the aged sample can be indicative of a tightly crosslinked polymer.

In a related study, a portion of the same polypropylene (from catalyst 18T₁) was annealed at 170° C for 7 - 10 minutes under nitrogen, then cooled at 10° C/minute to simulate a supercooling process that wipes out previous heating and cooling history without thermal degradation of the sample. The growth in tensile modulus for the annealed material was followed at 45° C for 70 hours, during which time the tensile modulus increased from 6.5 to 30 MPa. MDSC analysis of the aged sample showed a melt endotherm at 48° C, and a crystallinity of 24% was estimated from the melting enthalpy. WAXS and MDSC data was consistent with syndiotactic crystallinity in the aged material.

The ability of polypropylenes of the invention to organize over time was demonstrated for polymers prepared from catalysts 18T (polymerization at 50° C), 18S

(polymerization at 65° C), and 18Q, as well as from the hafnium metallocene catalyst prepared in Example 5.

Example 21

Permanent Set Properties of Polypropylenes

5 The two polypropylenes prepared as described in Examples 19 and 20 (*i.e.*, polypropylene from catalyst 18Q₁ and 18T₁, Table 2) were further characterized by their permanent set properties, by methods described in the art, in comparison to commercially-available rubbery polypropylene (Rexene™ D-100). In these
10 characterizations, "permanent set" of a given percentage means that, after stretching the material at a specified percent elongation for a specified time, the material equilibrates at a length longer than its original length by the given percentage. Thus, a permanent set of 10% means that the final length of the material was 10% longer than its original
15 length, and a permanent set of "nil" means that the final length was the same as the original length. The data for the characterizations is shown in Table 5, below. Methods described in U.S. Patent No. 5,549,080, Example 33, which employed an initial 300% elongation, and European Patent Application No. 707,016, p. 19, which employed an initial 100% elongation, as well as an initial elongation of 200%, were used.

20 Data in Table 5, below, show that polypropylenes of the invention exhibit less permanent set, *i.e.*, more elasticity, by any of three methods, than a commercial "elastic" polypropylene. The 75% permanent set in the commercial material can be interpreted as plastic deformation of crystallites, which was not observed in polypropylenes of the present invention. Elasticity is an important and useful characteristic in polymers used, *e.g.*, for adhesives.

Table 5
Permanent Set in Polypropylenes
Sample % Permanent Set

Method	18-Q ₁	18T	Rexene D-100 (Comparative)
A: Immediate Test	0	5.0	17.5
A: 10 Minutes Rest and Test	0	2.5	17.5
B: Immediate Test	2.5	10.0	85.0
B: 10 Minutes Rest and Test	2.5	7.5	75.0
C: Immediate Test	0	7.5	50.0
C: 10 Minute Rest and Test	0	5.0	42.5

- 5 Method A: EP 707016, p.19 Sample was stretched to 100% extension; held for one minute. Test set evaluated immediately after relaxation and 10 minutes after relaxation
- Method B: US 5,594,080 Sample was stretched to 300% and allowed to relax immediately. Evaluated immediately after relaxation and
- 10 10 minutes after relaxation
- Method C: Data were collected at 200% extension.

Example 22

Tack and Adhesion of Polypropylenes

- 15 Polymers prepared by the method described in Example 4 from catalysts 18S₁ and 18S₂ (Table 2), that is, the same catalyst but polymerization is carried out at +65° C (catalyst 18S₁) and at +28° C (catalyst 18S₂) were isolated, then blended as described below.

- 20 The polypropylene from catalyst 18S₁ (hereinafter referred to as 'polymer A') was a tacky, film forming material having a weight average molecular weight of 80,000 and an S.I. of 3.0. The polypropylene from catalyst 18S₂ (hereinafter referred to as 'polymer B') had a weight average molecular weight of 710,000 and an S.I. of 6.1. As noted in Example 14, polymer B was found to have twice as many rrrr pentads as polymer A. Blends of 70:30 A:B and 70:30 B:A were prepared and coated at two
- 25 thicknesses onto poly(butylene terephthalate) (PBT) that had been sputter plasma

etched to provide increased adhesiveness to coatings. Shear adhesion data for the four formulations are shown in Table 6, below, for a 1 Kg load on a 1 inch x ½ inch (2.5 cm x 1.3 cm) tape.

Blends were prepared in a Haake-Brabender mixing apparatus (C. W. Brabender Co., South Hackensack, NJ) at 210° C, then fused to the PBT using a Carver press at 177° C and 575 kPa for 3 minutes. Shear adhesion tests were performed according to ASTM Method D3654M-88. The data of Table 6 show that moderate to good pressure sensitive adhesives were formed from polypropylenes of the invention, and that failure-resistant bonding occurred when the majority of the polymer had a higher weight average molecular weight. Polypropylenes of the invention were blended with numerous other polymers, such as crystalline polypropylene(s), tacky poly-1-hexene and poly-1-octene to tailor the adhesive performance of the mixtures as well as the rheology of the mixtures (*i.e.*, hot-melt type adhesives were prepared from polypropylene and/or the mixtures noted above).

Table 6
Shear Adhesion
PSTC Test Method

Sample	Adhesive Blend Composition		Adhesive Thickness (Substrate, PBT)*	Shear Adhesion 23°C Minutes to Failure; 2.5 x 1.3 cm tape
	Polymer S ₁	Polymer S ₂		1 Kg Load
22A	70	30	0.0035	407
22B	30	70	0.0035	1895
22C	70	30	0.0015	200 (partial cohesive failure)
22D	30	70	0.0015	3380

*Sputter plasma etched polybutyleneterephthalate

Example 23

Polypropylene Physical Properties Based On Catalysts Having C_s Symmetry

A synopsis of physical properties observed for polypropylenes of the invention, prepared using catalysts having C_s symmetry, also referred to as Type A catalysts, is presented in Table 7, below. Samples were prepared by pressing the polypropylene

into a film in a Carver press at 175° C, then allowing the film to cool to 23° C over a short period of time. In the Table, Tensional Modulus values were obtained using a Rheometrics RSA II instrument. Extrusion viscosity values were obtained at 230° C (except for sample 23G, at 175° C), using a 1 mm diameter capillary having a length/diameter ratio of 50:1 on a Series 4200 Instron Capillary Rheometer (Instron Corp., Canton, MA). Tensile strength and elongation at break values were obtained using an Material Test System Model 880 servohydraulic tester (MTS Systems Corp., Minneapolis, MN) at a crosshead speed of 30.5 cm/minute. Inelasticity figures refer to a protocol of stretching a sample to 10% (ASTM D1774-90 using MTS Model 880 machine, also) and 15%, respectively, of its original length, holding for 3 minutes at 23° C, then releasing tension and allowing the sample to recover to an equilibrium length. The figure reported is the percent permanent elongation of the sample after release of tension.

Data shown in Table 7, below, support the observation that polypropylenes of the invention are highly elastic, having tensile strengths below 8.90 MPa with no observable yield point. The lack of a yield point indicated lack of measurable gross crystalline structure, further supporting the conclusion that these elastic polymers possessed a near perfect infinite network structure generated by nanocrystals of polypropylene.

Table 7

Type A Catalysts: Synopsis of Physical Properties of Polypropylene

Ex.	Catalyst (Table 2)	Tensile Strength MPa	Elongation at Break %	Tensional Modulus, Mpa		Inelasticity		Extrusion Viscosity @ 10sec-1, Pa-sec
				23°C	150°C	10% Strain	15% Strain	
23A	18Q ₁	2.14	545	2.21	1.69	4.5	0	1.1x10 ⁴
23B	18Q ₂	1.45	1100	1.76	0.90	0	2.7	1.0x10 ⁴
23C	18T ₁	2.21	710	13.0	2.21	0	2.8	1.0x10 ⁴
23D	18T ₂	3.04	1700	2.41	0.23	*	*	6x10 ³
23E	18R	0.59	1200	2.65	1.93	*	*	1x10 ⁴
23F	18U	2.55	345	1.04	*	*	*	1.1x10 ⁴
23G	18S ₁	~0.72	>1000	**	*	*	*	2.1x10 ² (175°C)
23H	18S ₂	8.90	≥1000	8.14	0.31	*	*	3.5x10 ³

* not measured

** not measurable in tension mode

Example 24

Polypropylene Physical Properties Based On Catalysts Having C₁ Symmetry

A synopsis of physical properties observed for polypropylenes of the invention, prepared using catalysts having C₁ symmetry, also referred to as Type B catalysts, is presented in Table 8, below. Measurements were taken as described in Example 23. Some of the polypropylenes of Table 8 exhibited very large extensibility (elongated at break), characteristic of polymers that were uncrosslinked or slightly crosslinked or having an irregular structure. In contrast to the data of Table 7 (Type A catalysts), polypropylenes described in Table 8 exhibited a yield point. Generally, polymers prepared using Type B catalysts had lower (peak) molecular weights than those from Type A catalysts, which were reflected in the generally lower extrusion viscosity values of Table 8 vs. Table 7.

The data of Table 8 also show another instance of the influence of catalyst molecular structure on polypropylene properties. Comparing the polymer obtained using catalyst 18B with that obtained using catalyst 18N, a significant decrease in the

yield point and tensile strength was noted. The molecular structure of catalyst 18B comprised a large, bulky phenyl group at the 3-position of the indenyl ligand, where it can significantly interact sterically with the incoming propylene monomer, whereas catalyst 18N had only a small hydrogen atom at the 3-position. It is believed that the decrease in the yield point and tensile strength of the polymer prepared using catalyst 18B was due to a decrease in structural order of the polymer, relative to that of the polymer prepared using catalyst 18N.

Table 8

Synopsis of Physical Properties of Polypropylenes Made with Class B Catalysts

Catalyst (Table 1)	Tensile Strength MPa	Elongation at Break %	Yield Point MPa	Tensile Modulus MPa	Shear Viscosity at 10 sec ⁻¹ , Pa-sec
18N*	0.93@ 5200%	5200 (no break)	0.62	2.30	480
18D	0.80 @ 1000%	1000 (no break)	0.34	9.90	3000
18B	0.27@ 2000%	2000 (no break)	0.07	2.10	280
18I	0.02	550	0.45	2.10	295
18AA	0.39	985	0.14	0.34	5000
18J	2.58 @ 1000%	1000 (no break)	1.30	7.25	1800
18K	3.30	500	1.69	7.25	4440
Ex 5	2.65	430	1.90	14.30	8000

* catalyst is known in the art

Various modification and alterations of this invention will become apparent to those skilled in the art without departing from the scope and intent of this invention, and it should be understood that this invention is not to be unduly limited to the following illustrative embodiments set forth herein.

CLAIMS

We claim:

1. A propylene homopolymer, said polymer being elastomeric and being soluble in at least one nonpolar organic solvent selected from the group consisting of toluene, xylene, heptane, and hexane, said polymer comprising
 - a) greater than 3 weight percent and up to 45 weight percent homotactic sequences each having only *r* or *m* diads, all of which homotactic sequences have a helical length in the range of 20 to 150Å, and
 - b) in the range of 55 to 97 weight percent of the total composition being the sum of
 - 1) homotactic sequences, each having only *r* or *m* diads, and being less than 20Å in helical length, and having fewer than 10 repeat units with *mmmm* pentads being present in the range of 0 to 35 weight percent of the total composition, and
 - 2) heterotactic sequences having unequal numbers of *r* and *m* diads, said polymer having a molecular weight (M_w) of at least 70,000.
2. The polymer according to claim 1 having one or more of the following characteristics:
 - i) a stereoregularity index between 1.30 and 10.00,
 - ii) a heat of fusion (ΔH_{fus}) that is less than 50% of the ΔH_{fus} of 100% isotactic polypropylene when $mm > rr$; or less than 50% of the ΔH_{fus} of 100% syndiotactic polypropylene when $rr > mm$, and
 - iii) optical clarity.
3. The polypropylene polymers according to claim 1 prepared by a metallocene catalyst having the formula

$$\{\text{ligand1} - \text{bridge} - \text{ligand2}\}MX_2$$

wherein ligand1 and ligand2 are different and are selected from the group consisting of cyclopentadienyl (Cp), indenyl (ind), fluorenyl (flu), 4,5-dihydrocyclopentaphenathryl

(H₂CPA), and cyclopentaphenanthryl (CPA) ring groups, wherein, the ring groups can be substituted by groups selected from the class consisting of

- i) C₁ - C₄ straight-chain or branched alkyl,
- ii) C₆ - C₂₀ aryl,
- 5 iii) C₇ - C₂₀ alkylaryl,
- iv) C₄ - C₇ cycloalkyl,
- v) (-CH₂)_n wherein n = 3, 4, or 5, or (-CH=CH-) _m wherein m is 1, 2, 3, or 4, connecting adjacent or non-adjacent ring carbon atoms in the same ring structure,
- 10 vi) fused aromatic rings, and
- vii) fused aromatic rings substituted by any one of groups i) - iv);

bridge is a linking group joining ligand 1 and ligand 2 at C-1 position of Cp and ind ligands or C-9 position of flu and CPA ligands and is selected from the group consisting of

- 15 i) >CR¹R²
- ii) >SiR¹R²
- iii) -CR¹R² - CR³R⁴-
- iv) -SiR¹R² - SiR³R⁴-
- v) -CR¹R² - SiR³R⁴-
- 20 vi) -SiR¹R² - CR³R⁴-,

wherein R¹, R², R³, and R⁴ can be the same or different and are selected from the group consisting of H, C₁ - C₂₀ straight-chain or branched alkyl, C₆ - C₂₀ aryl, and C₃ - C₈ cycloalkyl;

M is a metal atom selected from the group consisting of Zr, Hf, and Ti, preferably is zirconium, and


X is selected from the group consisting of Cl, Br, I, C₁ - C₂₀ straight-chain or branched alkyl, C₆ - C₂₀ aryl, C₇ - C₂₀ alkaryl, and C₇ - C₂₀ aralkyl.

4. The polypropylene polymer according to claim 1 having an *rr* triad content in the range of 29% to 73% and further comprising *rr* and *mm* sequences wherein the % *rr* sequences > % *mm* sequences.

5. The polymer according to claim 1 having an S.I. index in the range of 1.30 to 10.00 and optionally in the range of 1.30 to 7.00.

6. A blend of polymers comprising one or more propylene polymers according to claim 1 and optionally one or more of:
crystalline propylene having a melting point greater than 100 °C, polyhexene, polyoctene, tackifying resin, and an antioxidant.

7. A method of controlling the stereostructure of polypropylene in accordance with claim 1, said polypropylene having a stereoregularity index (S.I.) in the range of 1.30 and 10.00, comprising the step of: polymerizing propylene in the presence of a metallocene catalyst and an activating cocatalyst, said metallocene having the formula



wherein ligand1 and ligand2 are different and are selected from the group consisting of cyclopentadienyl (Cp), indenyl (ind), fluorenyl (flu), 4,5-dihydrocyclopentaphenanthryl, and cyclopentaphenanthryl (CPA) ring groups, wherein, the ring groups can be substituted by groups selected from the class consisting of

- i) $\text{C}_1 - \text{C}_4$ straight-chain or branched alkyl,
- ii) $\text{C}_6 - \text{C}_{20}$ aryl,
- iii) $\text{C}_7 - \text{C}_{20}$ alkylaryl,
- iv) $\text{C}_4 - \text{C}_7$ cycloalkyl
- v) $(-\text{CH}_2-)_n$ or $(-\text{CH}=\text{CH}-)_m$ connecting adjacent or non-adjacent ring carbon atoms in the same ring structure, wherein n is 3, 4, or 5, and m is 1, 2, 3, or 4,

- vi) fused aromatic rings, and
- vii) fused aromatic rings substituted by any one of groups i) - iv);

bridge is a linking group joining ligand 1 and ligand2 at C-1 position of Cp and ind ligands or C-9 position of flu and CPA ligands and is selected from the group consisting of

- i) $>\text{CR}^1\text{R}^2$
- ii) $>\text{SiR}^1\text{R}^2$
- iii) $-\text{CR}^1\text{R}^2 - \text{CR}^3\text{R}^4-$
- iv) $-\text{SiR}^1\text{R}^2 - \text{SiR}^3\text{R}^4-$

v) $-\text{CR}^1\text{R}^2 - \text{SiR}^3\text{R}^4-$

vi) $-\text{SiR}^1\text{R}^2 - \text{CR}^3\text{R}^4-$, wherein R^1 , R^2 , R^3 , and R^4 can be the same or different and are selected from the group consisting of H, $\text{C}_1 - \text{C}_{20}$ straight-chain or branched alkyl, $\text{C}_6 - \text{C}_{20}$ aryl, and $\text{C}_3 - \text{C}_8$ cycloalkyl;


5 M is a metal atom selected from the group consisting of Zr, Hf, and Ti, preferably is zirconium, and

X is selected from the group consisting of Cl, Br, I, $\text{C}_1 - \text{C}_{20}$ straight-chain or branched alkyl, $\text{C}_1 - \text{C}_{20}$ straight-chain or branched oxyalkyl, $\text{C}_6 - \text{C}_{20}$ aryl, $\text{C}_7 - \text{C}_{20}$ alkylaryl, and $\text{C}_7 - \text{C}_{20}$ arylalkyl.

10 said catalyst having an asymmetry parameter in the range of 1.03 and 1.69, wherein the stereoregularity index of said polypropylene increases with an increase in asymmetry parameter of said catalyst.

8. The method according to claim 7 wherein said propylene is polymerized in the presence of an olefin comonomer having 2 to 20 carbon atoms.

9. A metallocene catalyst and an activating cocatalyst for olefin polymerization, said metallocene having the structure



20 wherein

ligand1 and *ligand2* are different and are selected from the group consisting of substituted and unsubstituted cyclopentadienyl, indenyl, fluorenyl, and cyclopentaphenanthryl ring groups, wherein, when present, ring group substituents are selected from the group consisting of

25 i) $\text{C}_1 - \text{C}_4$ straight-chain or branched alkyl,

ii) $\text{C}_6 - \text{C}_{20}$ aryl,

iii) $\text{C}_7 - \text{C}_{20}$ alkylaryl,

iv) $\text{C}_4 - \text{C}_7$ cycloalkyl

v) $(-\text{CH}_2-)_n$ or $(-\text{CH}=\text{CH}-)_m$ connecting adjacent or non-adjacent

30 ring carbon atoms in the same ring structure, wherein n is 3, 4, or 5, or $m = 1, 2, 3$, or 4,

vi) fused aromatic rings, and

vii) fused aromatic rings substituted by any one of groups i) - v);

bridge is selected from the group consisting of

- i) $>CR^1R^2$
- ii) $>SiR^1R^2$
- iii) $-CR^1R^2 - CR^3R^4-$
- iv) $-SiR^1R^2 - SiR^3R^4-$
- v) $-CR^1R^2 - SiR^3R^4-$
- vi) $-SiR^1R^2 - CR^3R^4-$, wherein R^1, R^2, R^3 , and R^4 can be the same or

different and are selected from the group consisting of H, $C_1 - C_{20}$ straight-chain or branched alkyl, $C_6 - C_{20}$ aryl, and $C_3 - C_8$ cycloalkyl;

M is a metal atom selected from the group consisting of Zr, Hf, and Ti, and

X is selected from the group consisting of Cl, Br, I, $C_1 - C_{20}$ straight-chain or branched alkyl, $C_6 - C_{20}$ aryl, $C_7 - C_{20}$ alkylaryl, and $C_7 - C_{20}$ arylalkyl,

wherein the metallocene catalyst exhibits an asymmetry parameter of 1.30 to 1.69, with the proviso that when $M=Zr$, and $bridge=C_2H_4$, then component (v) is

$(-CH_2-)_n$ or $(-CH=CH)_{m'}$, wherein $n=3, 4$, or 5 and m' is $2, 3$ or 4 .

10. The metallocene catalyst and activating cocatalyst according to claim 9 which provides propylene polymers according to claim 1.

11. The metallocene catalyst and activating cocatalyst according to claim 9 wherein at least one of ligand 1 and ligand 2 comprises a 4,5-H-dihydrocyclopentaphenanthrene which includes a fluorenyl group.

12. The metallocene catalyst and activating cocatalyst according to claim 9 wherein

bridge is



and wherein R^1 and R^2 are selected from the group consisting of phenyl and methyl.

13. The metallocene catalyst and activating cocatalyst according to claim 9 wherein $M = Zr$.

14. The metallocene catalyst and activating cocatalyst according to claim 13 wherein when X = an alkyl or aralkyl group, and said activator cocatalyst is a $(C_6H_5)_3C(+)$ salt of a noncoordinating anion or an onium compound having the formula $R_1R_2R_3QH(+)$ wherein Q = N or P and R_1, R_2, R_3 are as previously defined.

15. The metallocene catalyst according to claim 13 wherein X = halogen, said activating cocatalyst is an aluminoxane compound.

16. The metallocene catalyst according to claim 13 selected from the group consisting of

{flu-C₂H₄-2-methyl-4,5-benzindenyl} ZrCl₂

{flu-SiMe₂-CPA} ZrCl₂

{flu-SiPh₂-CPA} ZrCl₂

{flu-C₂H₄-H₂CPA} ZrCl₂

{flu-SiMe₂-H₂CPA} ZrCl₂

{flu-SiPh₂-H₂CPA} ZrCl₂,

{perhydrocyclopentaphenanthryl-C₂H₄-perhydrofluorenyl} ZrCl₂,

wherein

CPA = 4H - cyclopentaphenanthryl,

H₂CPA = 4,5-dihydrocyclopentaphenanthryl,

flu = fluorenyl,

Me = methyl, and

Ph = phenyl.

17. A composition of matter having a formula selected from the group consisting of

H {flu-C₂H₄-H₂CPA} H


H {flu-C₂H₄-2-CH₃-4,5-benzindene} H

H {flu-SiR₂-CPA} H

H {flu-SiR₂-H₂CPA} H

wherein R is a methyl or phenyl group.

18. A method of making chemical compounds having the formula



wherein ligand1 and ligand2 are different and are selected from the group consisting of substituted and unsubstituted cyclopentadienyl, indenyl, fluorenyl, and cyclopentaphenanthrene ring groups, wherein, when present, ring group substituents are selected from the group consisting of

i) $\text{C}_1 - \text{C}_4$ straight-chain or branched alkyl,

ii) $\text{C}_6 - \text{C}_{20}$ aryl,

iii) $\text{C}_7 - \text{C}_{20}$ alkylaryl,

iv) $\text{C}_4 - \text{C}_7$ cycloalkyl

v) $(-\text{CH}_2-)_n$ or $(-\text{CH}=\text{CH}-)_m$ connecting to adjacent or non-adjacent ring carbon atoms in the same ring structure, wherein n is 3, 4, or 5, and m = 1, 2, 3, or 4,

vi) fused aromatic rings, and


vii) fused aromatic rings substituted by any one of groups i) - v),

comprising the steps:

1) deprotonating the hydroxyl group of a compound of the type




2) reacting the deprotonated compound with highly fluorinated alkyl sulfonyl fluoride to obtain a highly fluorinated alkyl sulfonate of the type



wherein R_f is a straight chain, branched, or cyclic alkyl group containing 1 to 20 carbon atoms and optionally O, N, or S heteroatoms, with more than 50% of the H atoms being replaced by fluorine atoms;


3) condensing the sulfonate with the conjugate base of a compound of the

type



19. The method according to claim 18 wherein R_f is a perfluorinated alkyl group.

20. A method of producing polypropylene in the presence of a metallocene catalyst and an activating cocatalyst, said metallocene, comprising contacting propylene with a catalyst having the structure



wherein

ligand1 and *ligand2* are different and are selected from the group consisting of substituted and unsubstituted cyclopentadienyl, indenyl, fluorenyl, and cyclopentaphenanthrene ring groups, wherein, when present, ring group substituents are selected from the group consisting of

- i) $C_1 - C_4$ straight-chain or branched alkyl,
- ii) $C_6 - C_{20}$ aryl,
- iii) $C_7 - C_{20}$ alkylaryl,
- iv) $C_4 - C_7$ cycloalkyl
- v) $(-CH_2-)_n$ or $(-CH=CH-)_m$ connecting adjacent or non-adjacent ring carbon atoms in the same ring structure, wherein n is 3, 4, or 5, and $m = 1, 2, 3, \text{ or } 4$,
- vi) fused aromatic rings, and
- vii) fused aromatic rings substituted by any one of groups i) - v);

bridge is selected from the group consisting of

- i) $>CR^1R^2$
- ii) $>SiR^1R^2$
- iii) $-CR^1R^2 - CR^3R^4-$
- iv) $-SiR^1R^2 - SiR^3R^4-$
- v) $-CR^1R^2 - SiR^3R^4-$
- vi) $-SiR^1R^2 - CR^3R^4-$, wherein R^1, R^2, R^3 , and R^4 can be the same or

different and are selected from the group consisting of H, $C_1 - C_{20}$ straight-chain or branched alkyl, $C_6 - C_{20}$ aryl, and $C_3 - C_8$ cycloalkyl;

M is a metal atom selected from the group consisting of Zr, Hf, and Ti, and

X is selected from the group consisting of Cl, Br, I, $C_1 - C_{20}$ straight-chain or branched alkyl, $C_6 - C_{20}$ aryl, $C_7 - C_{20}$ alkylaryl, and $C_7 - C_{20}$ arylalkyl,

wherein the metallocene catalyst exhibits an asymmetry parameter of 1.03 to 1.69.

21. The method according to claim 20 wherein said catalyst is $\{\text{ind-C}_2\text{H}_4\text{-flu}\}\text{ZrCl}_2$ and said polypropylene polymer is elastomeric.

22. The method according to claim 20 further comprising the step of adding hydrogen gas to modify the product molecular weight.

23. The method according to claim 20 wherein said polypropylene is polymerized in the presence of an olefin comonomer having 2 to 20 carbon atoms.

24. The article according to claim 23 comprising a pressure sensitive adhesive.

25. The polypropylene according to claim 1 wherein the storage modulus vs. temperature up to 175°C produces a tracing that is essentially flat and wherein elongation without break exceeds 4,000%.

26. A propylene copolymer, said copolymer being elastomeric and being soluble in at least one nonpolar organic solvent selected from the group consisting of toluene, xylene, heptane, and hexane, said polymer comprising

- a) greater than 3 weight percent and up to 45 weight percent homotactic sequences each having only *r* or *m* diads, all of which homotactic sequences have a helical length in the range of 20 to 150Å, and
- b) in the range of 55 to 97 weight percent of the total composition being the sum of
 - 1) homotactic sequences, each having only *r* or *m* diads, and being less than 20Å in helical length, and
 - 2) heterotactic sequences having unequal numbers of *r* and *m* diads,said polymer having a molecular weight (M_w) of at least 35,000.

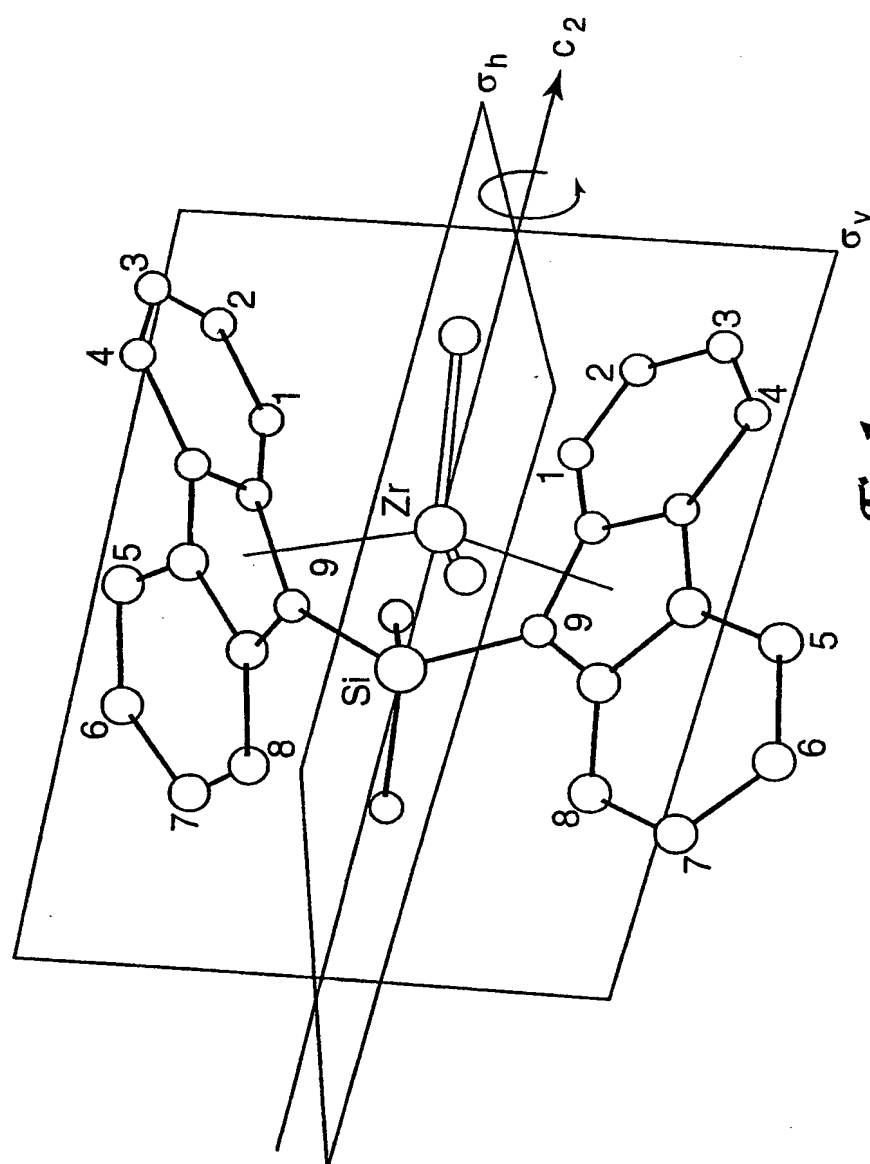


Fig. 1
Comparative

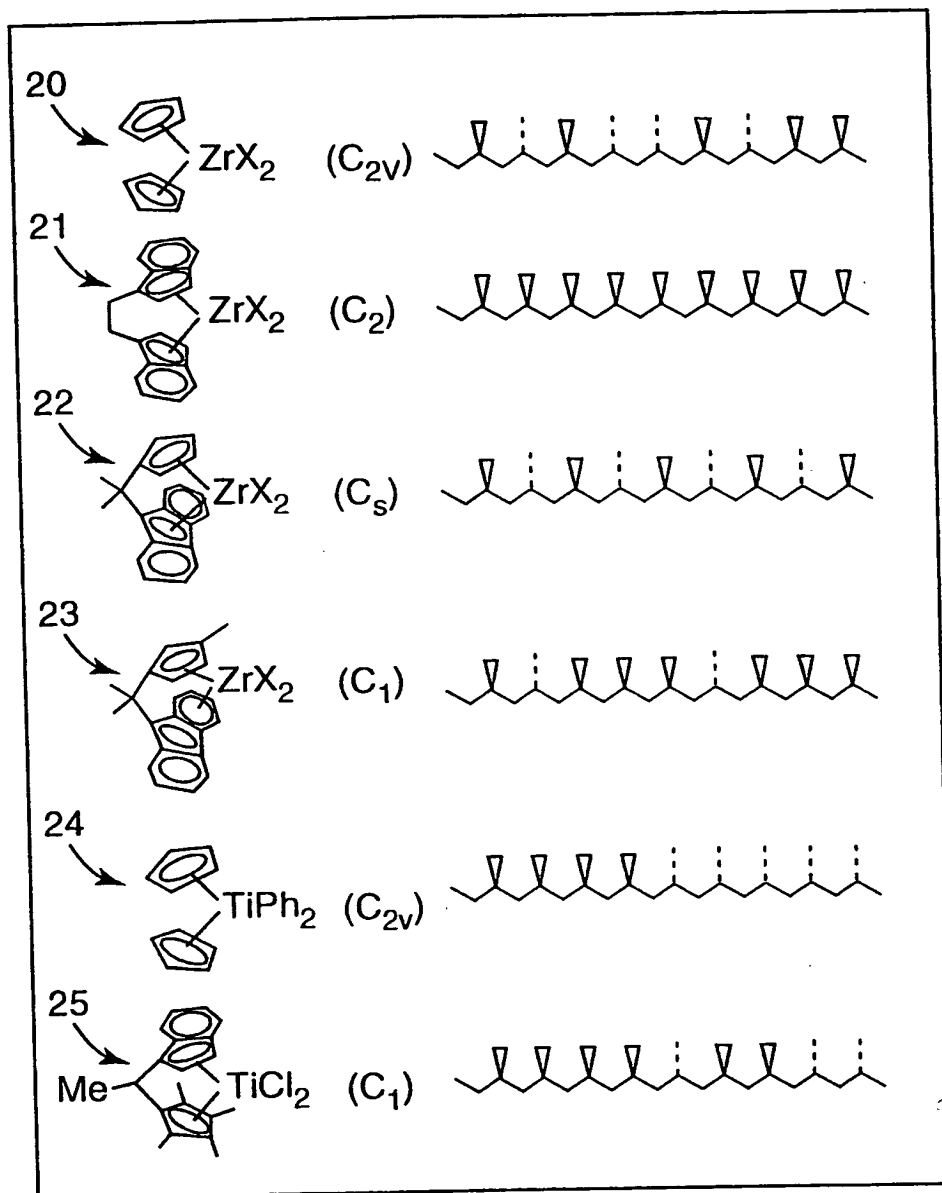


Fig.2
Comparative

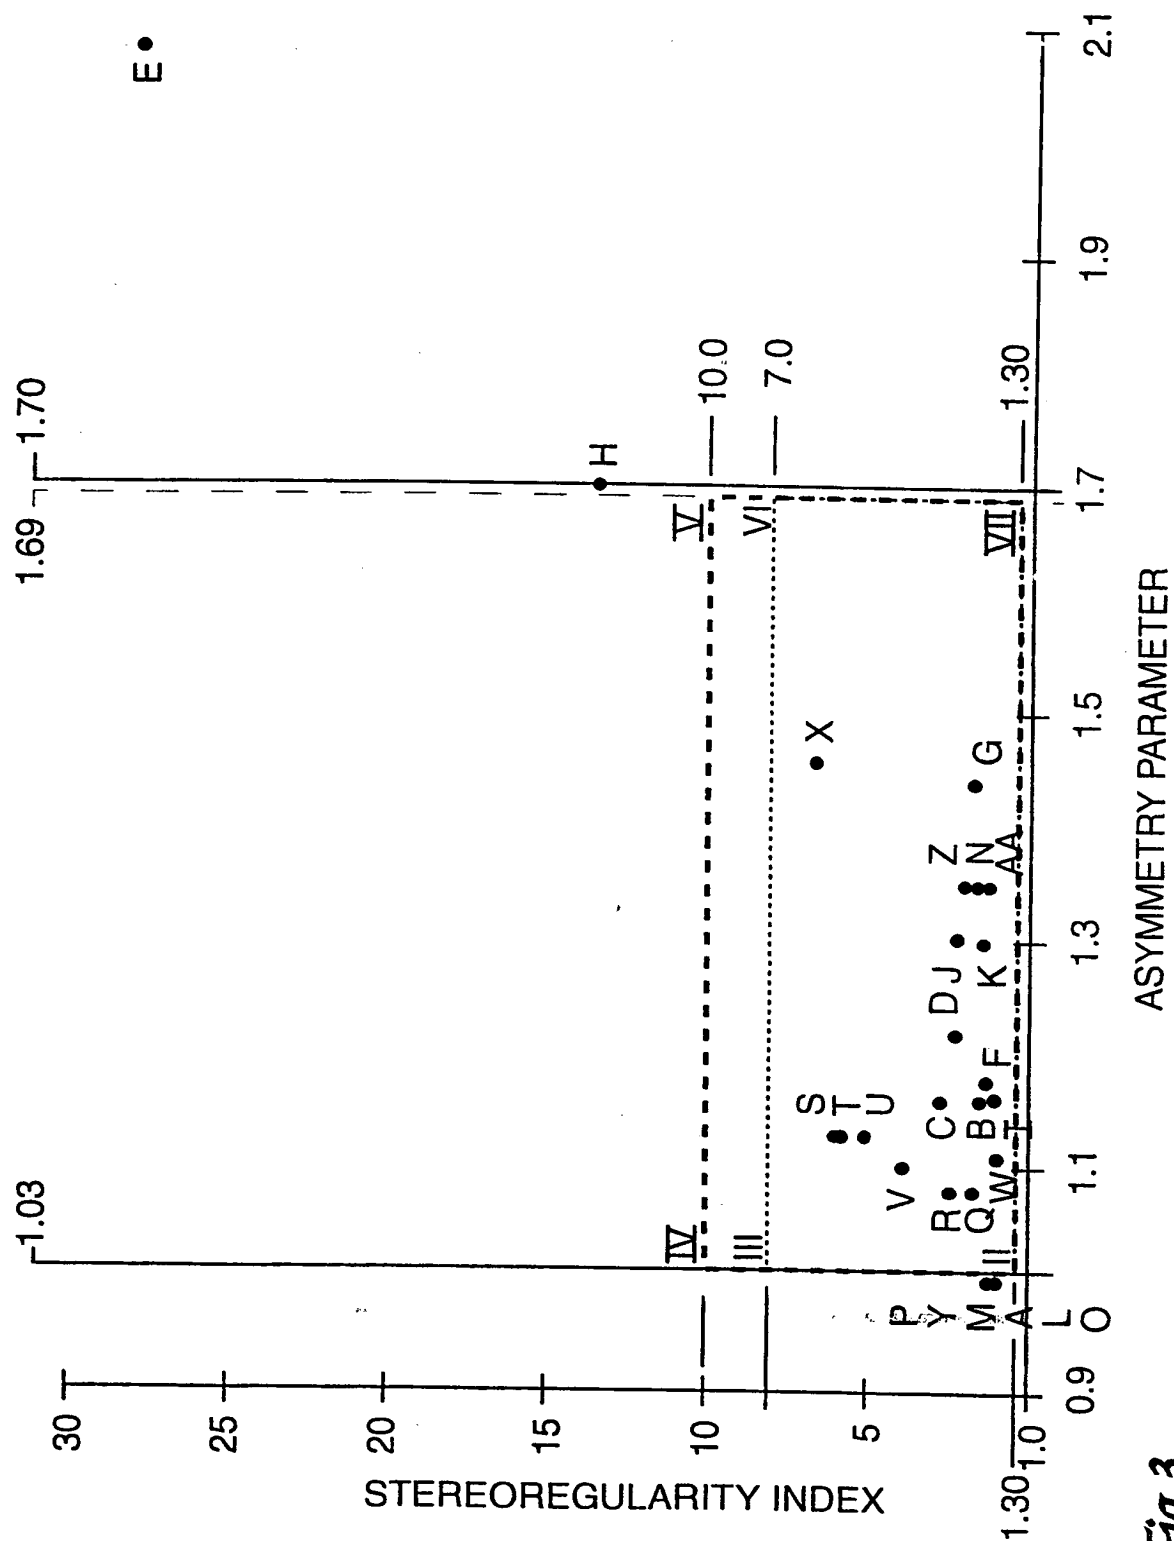
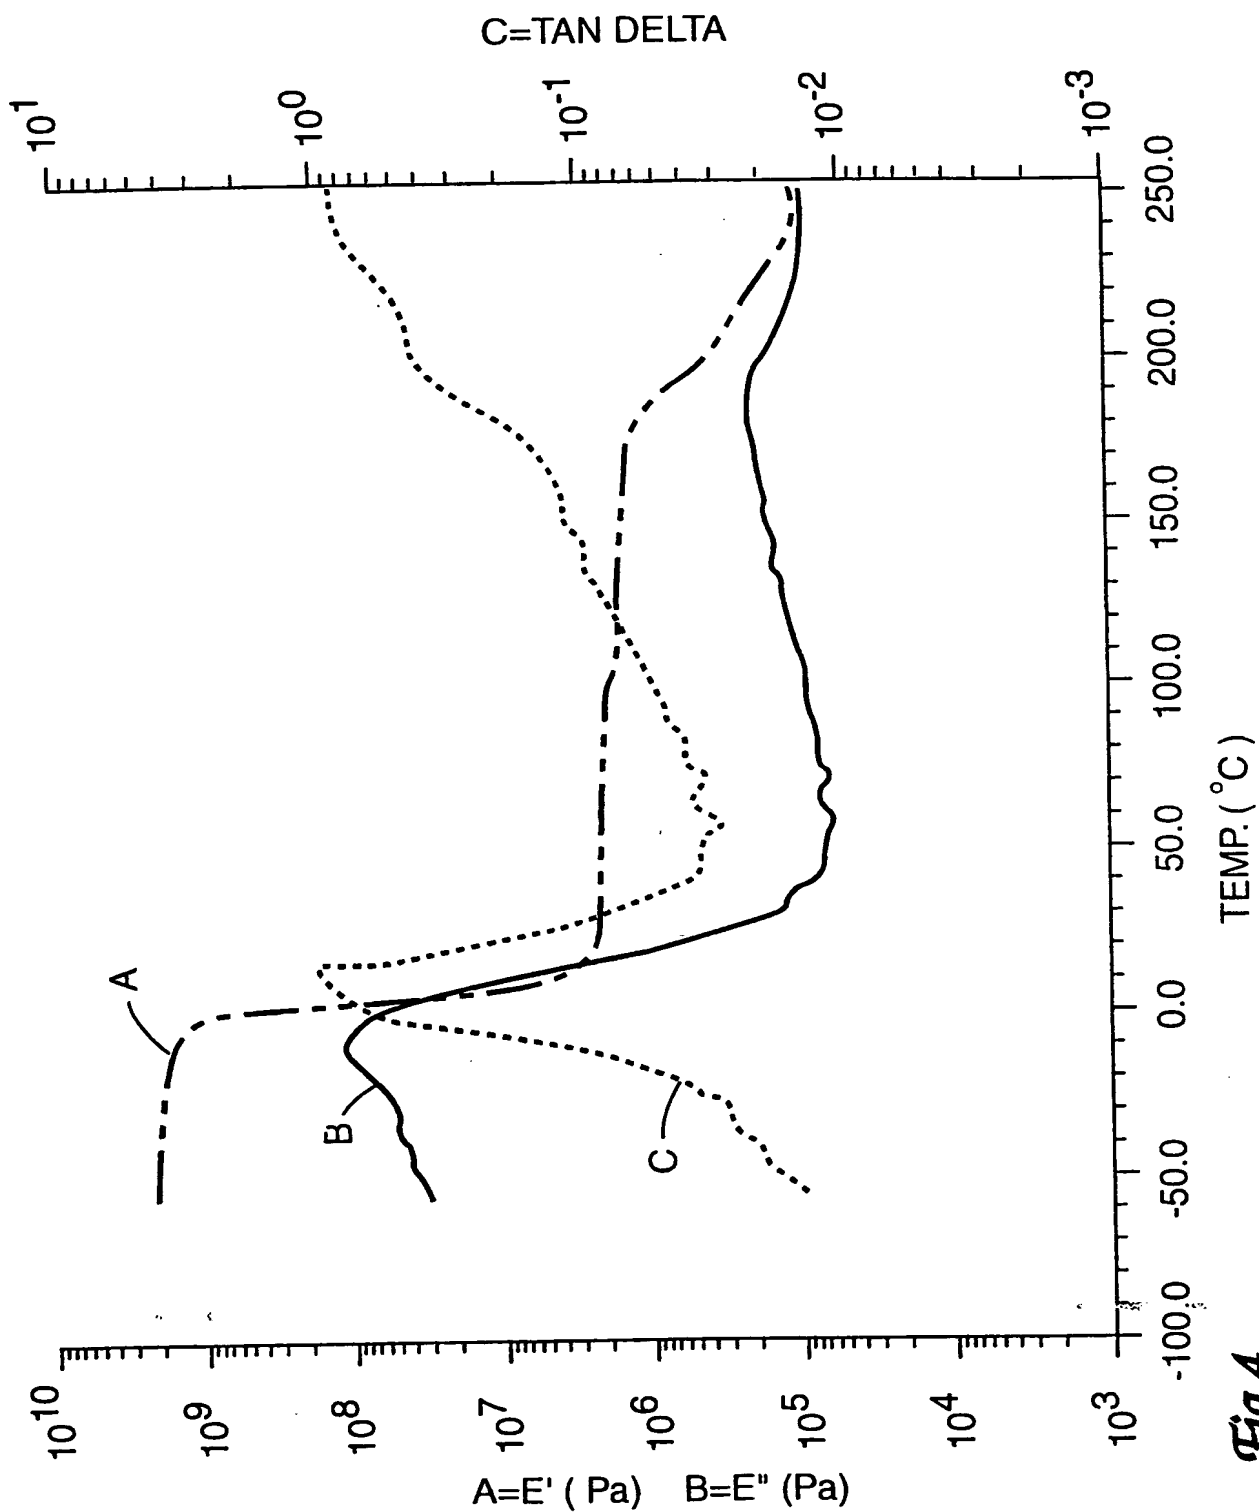
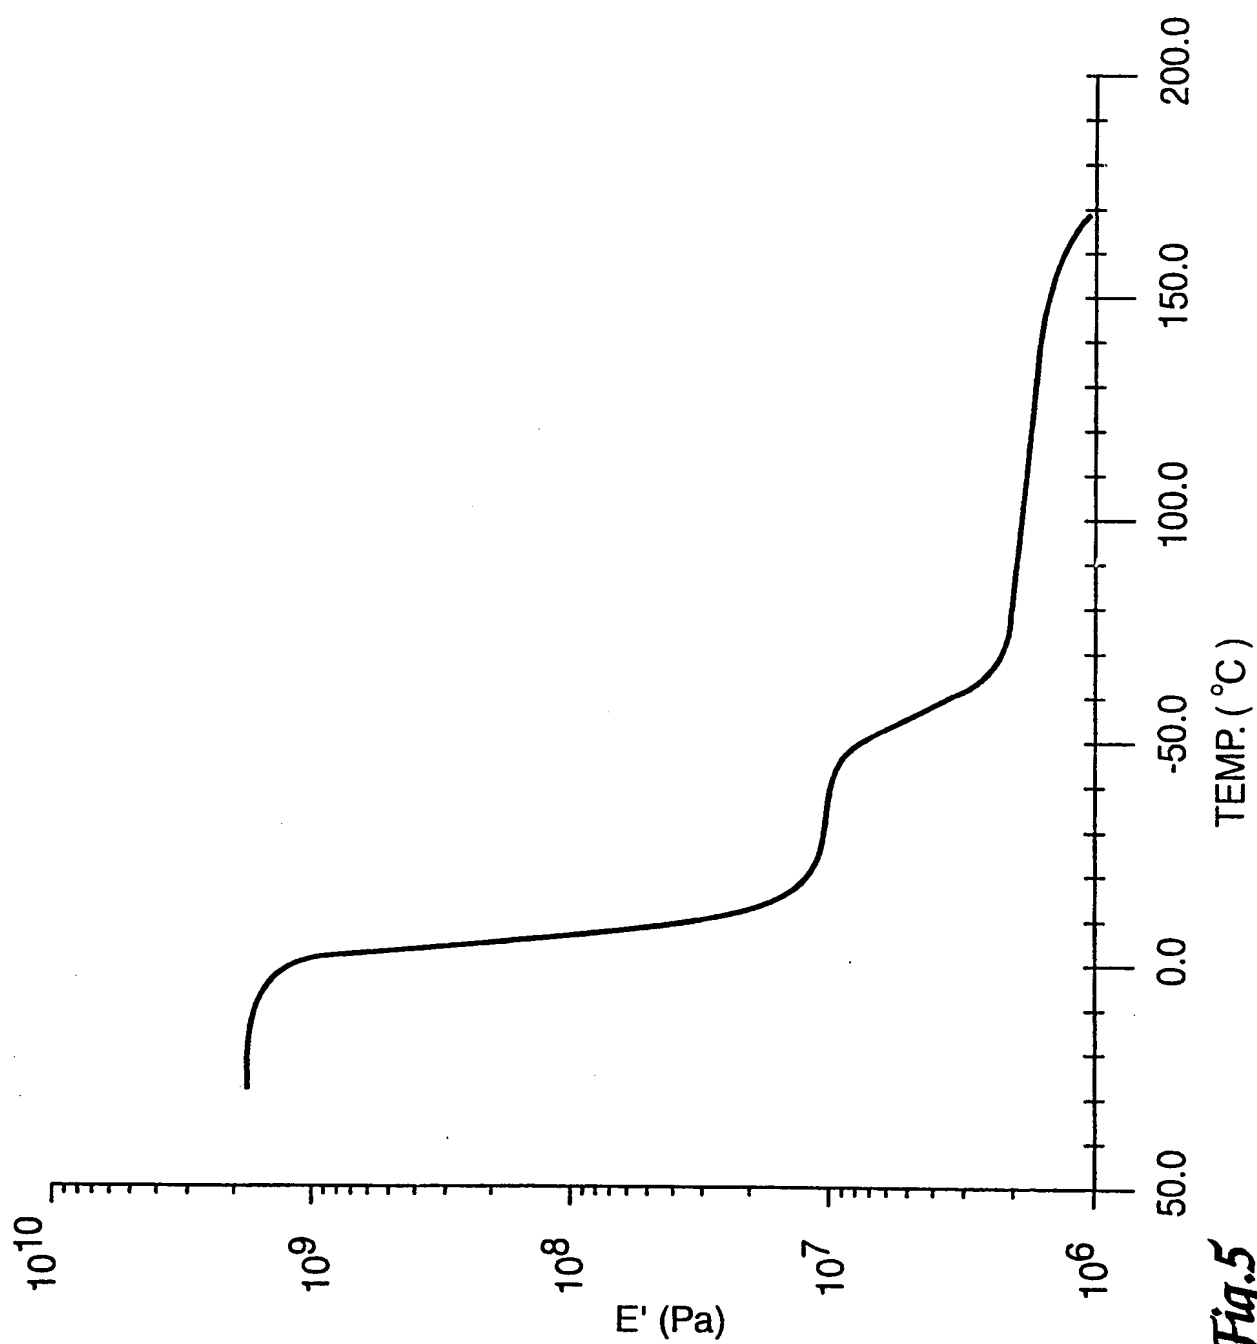


Fig.3



*Fig. 5*

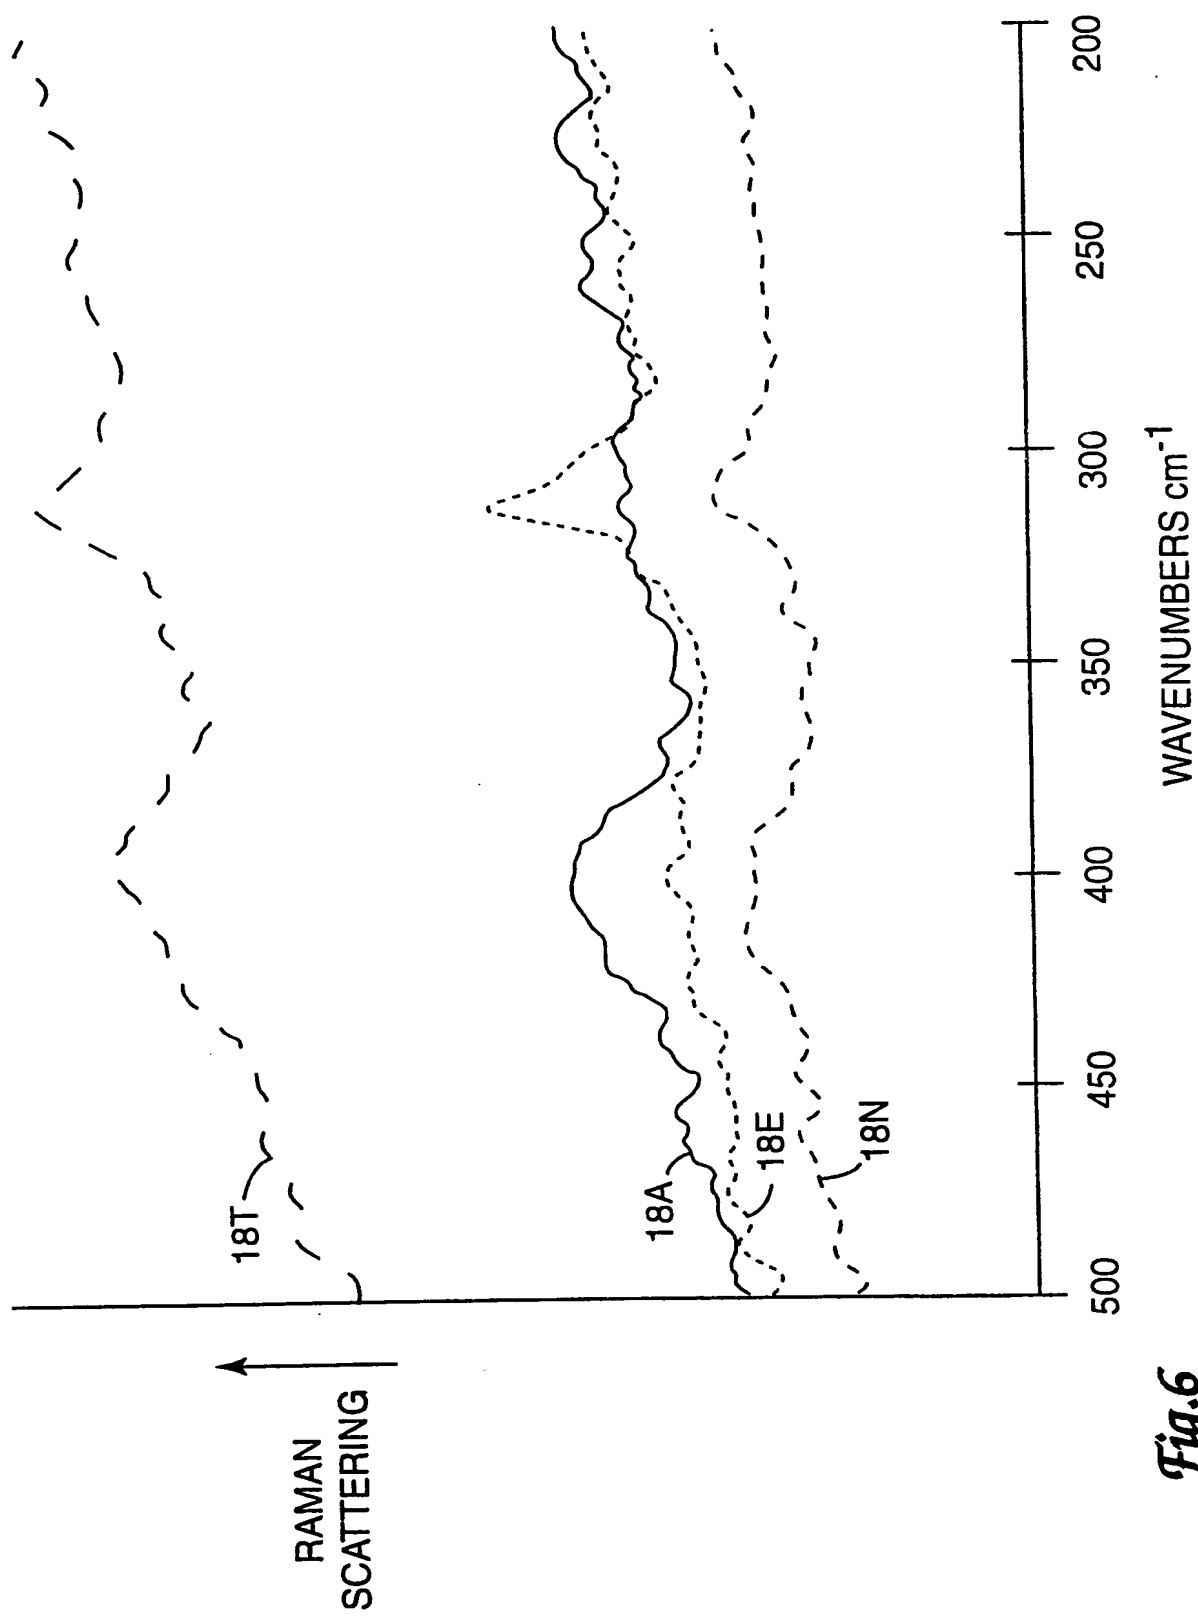


Fig.6



PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 10/06, 4/64, C07C 13/567, 13/66	A3	(11) International Publication Number: WO 99/20664 (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/US98/22028 (22) International Filing Date: 19 October 1998 (19.10.98) (30) Priority Data: 08/956,880 23 October 1997 (23.10.97) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: SIEDLE, Allen, R.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MISEMER, David, K.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). KOLPE, Vasant, V.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). DUERR, Brook, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: DAHL, Philip, Y. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 18 November 1999 (18.11.99)
(54) Title: ELASTIC POLYPROPYLENES AND CATALYSTS FOR THEIR MANUFACTURE (57) Abstract A propylene polymeric composition with elastic character that is soluble in at least one nonpolar organic solvent selected from the group consisting of toluene, xylene, heptane, and hexane, comprises greater than 3 weight percent and up to 45 weight percent homotactic sequences each having only <i>r</i> or <i>m</i> diads, all of which homotactic sequences have a helical length in the range of 20 to 150 Å, and in the range of 55 to 97 weight percent of the sum of homotactic sequences of less than 20 Å in helical length, each homotactic sequence having only <i>r</i> or <i>m</i> diads and having fewer than 10 repeat units with <i>mmmm</i> pentads being present in the range of 0 to 35 weight percent of the total composition, and heterotactic sequences having <i>r</i> and <i>m</i> diads of unequal number, the polymer having a molecular weight (<i>M_w</i>) of at least 70,000.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

/US 98/22028

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08F10/06 C08F4/64 C07C13/567 C07C13/66

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08F C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 668 230 A (SCHERTL PETER ET AL) 16 September 1997 (1997-09-16) example I example 13; table I claims 1,2,10,18	9,13,15
A	column 8; example 13; table 1 ---	17-19
X	US 5 436 305 A (PALACKAL SYRIAC J ET AL) 25 July 1995 (1995-07-25) column 16, line 35; example A column 19, line 57 - line 65; example XIII example 25; table III --- -/--	20-22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 August 1999

Date of mailing of the international search report

20. 09. 1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fischer, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/22028

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 754 698 A (MITSUI PETROCHEMICAL IND) 22 January 1997 (1997-01-22) page 44; example 1	9,12,13, 15
Y	example 1	16
Y	page 8, line 12	16-19
X	see page 50; comparative example 5	20,21
P,Y	----- US 5 726 264 A (ALT HELMUT G ET AL) 10 March 1998 (1998-03-10) column 3, line 24 - column 4, line 67 column 7, line 36 - column 9, line 53	17-19
X	----- EP 0 628 577 A (PHILLIPS PETROLEUM CO) 14 December 1994 (1994-12-14) page 10; table I page 10, line 53 - page 11, line 3 table II page 11, line 21 - line 40 example VIII	1,2,4,5
X	----- WO 90 12816 A (SHELL OIL CO) 1 November 1990 (1990-11-01) page 3, line 20 - page 5, line 2 page 16, line 7 - line 8 examples 1-4; table 1 examples 3,4; table 2	1,2,5
A	-----	25

INTERNATIONAL SEARCH REPORT

International application No.
/US 98/22028

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 10, 24
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1998)

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 10, 24

Claim 10: Catalyst characterized by the polymer which it provides.

Claim 24: Article according to claim 23, whereas claim 23 is related to a method of producing polypropylene

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 3,7,8,9,11,12,13,14,15,16,18,19,20-23

Metallocene catalysts of formula (I) $L_1RL_2MX_2$, specific examples thereof, method of producing polypropylene therewith and polypropylene produced by this method.

The common technical feature linking this set of claims in the metallocene of formula (I)

2. Claims: 1,2,4,5,6,25,26

Propylene homopolymer or copolymer having specific characteristics (solubility, homotactic sequences of given length) and blend thereof.

3. Claims: 17,18,19

Method of preparing ligands $L_1-CH_2-CH_2-L_2$ and some specific examples of L_1-R-L_2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/22028

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5668230	A	16-09-1997	US 5571880 A	05-11-1996
			US 5436305 A	25-07-1995
			AU 667449 B	21-03-1996
			AU 1028495 A	10-08-1995
			CA 2135225 A	04-08-1995
			CN 1109472 A	04-10-1995
			EP 0666267 A	09-08-1995
			JP 7278169 A	24-10-1995
			NO 944857 A	04-08-1995
			US 5451649 A	19-09-1995
			US 5594078 A	14-01-1997
			US 5627247 A	06-05-1997
			US 5534473 A	09-07-1996
			AU 649821 B	02-06-1994
			AU 1700292 A	11-03-1993
			CA 2067525 A,C	10-11-1992
			CN 1068829 A	10-02-1993
			EP 0524624 A	27-01-1993
			FI 923337 A	24-01-1993
			HU 212903 B	30-12-1996
			JP 10226695 A	25-08-1998
			JP 2791247 B	27-08-1998
			JP 5239082 A	17-09-1993
			MX 9202788 A	01-01-1993
			NO 304553 B	11-01-1999
			SG 44707 A	19-12-1997
			SK 230392 A	10-05-1995
			US 5401817 A	28-03-1995
			US 5631335 A	20-05-1997
			US 5466766 A	14-11-1996
			US 5459218 A	17-10-1995
			US 5627118 A	06-05-1997
			US 5710224 A	20-01-1998
			US 5565592 A	15-10-1996
			US 5610247 A	11-03-1997
			US 5637744 A	10-06-1997
			US 5616752 A	01-04-1997
<hr/>				
US 5436305	A	25-07-1995	US 5191132 A	02-03-1993
			AU 649821 B	02-06-1994
			AU 1700292 A	11-03-1993
			CA 2067525 A,C	10-11-1992
			CN 1068829 A	10-02-1993
			EP 0524624 A	27-01-1993
			FI 923337 A	24-01-1993
			HU 212903 B	30-12-1996
			JP 10226695 A	25-08-1998
			JP 2791247 B	27-08-1998
			JP 5239082 A	17-09-1993
			MX 9202788 A	01-01-1993
			NO 304553 B	11-01-1999
			SG 44707 A	19-12-1997
			SK 230392 A	10-05-1995
			US 5401817 A	28-03-1995
			US 5631335 A	20-05-1997
			US 5466766 A	14-11-1995
			US 5571880 A	05-11-1996
			US 5451649 A	19-09-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

US 98/22028

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5436305 A		US 5594078 A	14-01-1997
		US 5459218 A	17-10-1995
		US 5627118 A	06-05-1997
		US 5710224 A	20-01-1998
		US 5565592 A	15-10-1996
		US 5627247 A	06-05-1997
		US 5610247 A	11-03-1997
		US 5637744 A	10-06-1997
		US 5616752 A	01-04-1997
		US 5534473 A	09-07-1996
		US 5668230 A	16-09-1997
		AT 158269 T	15-10-1997
		CA 2061559 A,C	10-11-1992
		CN 1066440 A,B	25-11-1992
		DE 69222221 D	23-10-1997
		DE 69222221 T	15-01-1998
		EP 0512554 A	11-11-1992
		ES 2106795 T	16-11-1997
		JP 5148166 A	15-06-1993
		MX 9202154 A	01-11-1992
		US 5406013 A	11-04-1995
		US 5541351 A	30-07-1996
		US 5210352 A	11-05-1993
		US 5393911 A	28-02-1995
EP 0754698 A	22-01-1997	CA 2181307 A	18-01-1997
		CN 1156728 A	13-08-1997
		JP 9235313 A	09-09-1997
US 5726264 A	10-03-1998	NONE	
EP 0628577 A	14-12-1994	US 5401817 A	28-03-1995
		BR 9402019 A	07-03-1995
		CA 2117031 A,C	21-11-1994
		DE 69416721 D	08-04-1999
		DE 69416721 T	22-07-1999
		EP 0875517 A	04-11-1998
		ES 2128457 T	16-05-1999
		FI 942333 A	21-11-1994
		JP 7138275 A	30-05-1995
		NO 941887 A	21-11-1994
		US 5571880 A	05-11-1996
		US 5451649 A	19-09-1995
		US 5459218 A	17-10-1995
		US 5627118 A	06-05-1997
WO 9012816 A	01-11-1990	US 5270276 A	14-12-1993
		AT 145925 T	15-12-1996
		AU 650234 B	16-06-1994
		AU 5655790 A	16-11-1990
		CA 2053266 A	26-10-1990
		DE 69029324 D	16-01-1997
		DE 69029324 T	30-04-1997
		EP 0470171 A	12-02-1992
		ES 2097146 T	01-04-1997
		JP 4504875 T	27-08-1992
		KR 9403857 B	04-05-1994
		US 5270410 A	14-12-1993

THIS PAGE BLANK (USPTO)